

- LINK stands as the newest member of the linear interior family, introducing a versatile array of options to diverse lighting needs.
- LINK SF has three type of surface models (MINI /MIDI/ HV), available as ready luminaires in different lengths.
- It is offered either in full or in dashed type with different light output arrangements.
- It is offered anodized, white (RAL 9003), or black (RAL 9005) colour. Other RAL colours also available upon request.
- LINK SF as ready luminaire is available either directional or diffused with Samsung LED: L90/B10 >50.000h.
- LINK MINI and LINK MIDI are only available 24VDC.
- LINK HV is only available 230VAC.
- LINK MIDI and LINK HV are available with flat or curved cover
- Low UGR ensuring visual comfort (UGR <19 for all directional Models).
- Indoor use: IP40
- Customized options are also available upon request


Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/PUSH BUTTON/Bluetooth

L90/B10 >50.000h

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Custom LED output combinations




DIRECT LIGHTING


Symmetrical lens: 30°, 55°, 65° (Monochromatic), 60° (TW)
Diffused: PC Frosted, PC Milky, Microprismatic Cover

DIRECTIONAL




DIFFUSED

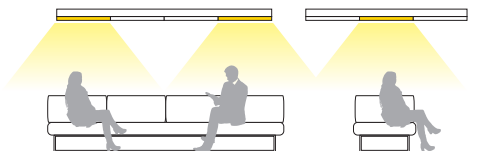


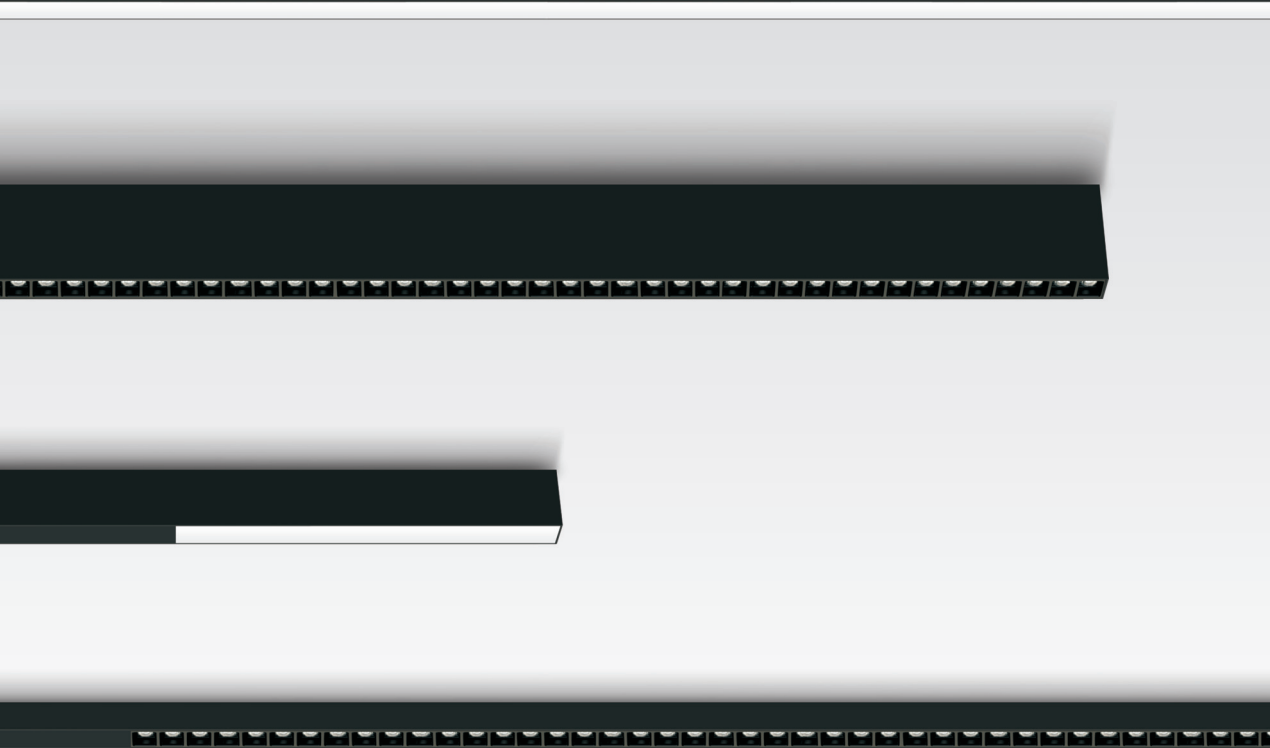

Flat Cap

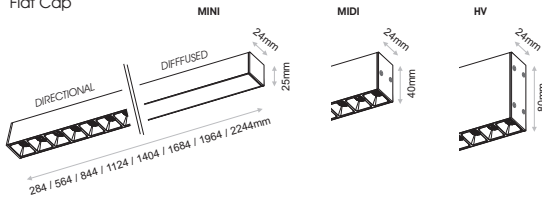

Curved Cap

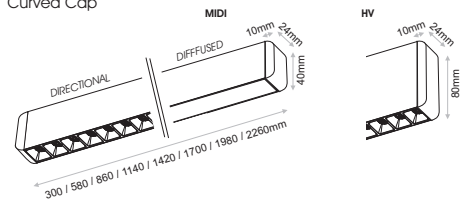

DIRECTIONAL

Model	Type	Colour*	CCT	CRI80, CRI90 LED Source per 7.2W		Beam Angle	Watt	End Cap** Total Length (cm)		Voltage***
				Flat Cap (FC)	Curved Cap (CR)					
LINK MINI <i>(LINK MINI)</i>	Full type	Luminaire Colour Anodized (A)	2700K (27)	945lm	800lm	30° (30)	7.2W (07)	28.4	30	24VDC
			3000K (30)	970lm	820lm	55° (55)	14.4W (14)	56.4	58	(24)
			4000K (40)	1030lm	870lm	65° (65)	21.6W (22)	84.4	86	230VAC
LINK MIDI <i>(LINK MIDI)</i>	Surface Directional F <i>(SF DRF)</i>	White (W) Black (B)	5700K (57)	1040lm	880lm		28.8W (29)	112.4	114	(230)
							36W (36)	140.4	142	
LINK HV <i>(LINK HV)</i>	Mask/Blank Colour White (W) Black (B)	Tunable White DT8 2700K-6500K <i>(TW)</i>	870lm	735lm	60° (60)	43.2W (43)	168.4	170		
			940lm	795lm		50.4W (50)	196.4	198		
						57.6W (58)	224.4	226		
	Dashed type Surface Directional D <i>(SF DRD)</i>	Anodized (A) White (W) Black (B)				Watt / Position				
							14.4W / A1 (A1)	84.4	86	
						7.2W / A2 (A2)	84.4	86		
						14.4W / B1 (B1)	112.4	114		
						14.4W / B2 (B2)	112.4	114		
						14.4W / C1 (C1)	140.4	142		
						21.6W / C2 (C2)	140.4	142		
						21.6W / C3 (C3)	140.4	142		
						28.8W / D1 (D1)	196.4	198		
						21.6W / D2 (D2)	196.4	198		
						36W / D3 (D3)	196.4	198		

* LINK MINI End Cap & Curved End Caps only available in Black & White.

** LINK MINI only available with Flat Cap.

*** LINK MINI & LINK MIDI only available in 24VDC / LINK HV only available in 230VAC.


Full type



Flat Cap: 28.4 / 56.4 / 84.4 / 112.4 / 140.4 / 168.4 / 196.4 / 224.4cm
Curved Cap: 30.0 / 58.0 / 86.0 / 114.0 / 142.0 / 170.0 / 198.0 / 226.0cm

Ordering Code Example: LINK MINI SF DRF-BBB-3080-65-43FC-24

Dashed type



A1 14.4W / 84.4cm - 86cm

A2 7.2W / 84.4cm - 86cm

B1 14.4W / 112.4cm - 114cm

B2 14.4W / 112.4cm - 114cm

C1 14.4W / 140.4cm - 142cm



C2 21.6W / 140.4cm - 142cm

C3 21.6W / 140.4cm - 142cm

D1 28.8W / 196.4cm - 198cm

D2 21.6W / 196.4cm - 198cm

D3 36W / 196.4cm - 198cm

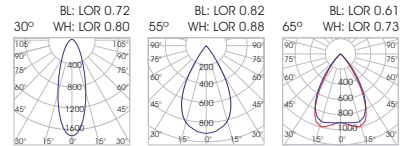

DIFFUSED

Model	Type*	Colour*	CCT	CRI90 LED Source per 5.6W	Cover With LED Strip	Watt	End Cap** Total Length (cm)		Voltage***
				≥ 90 (90)			Flat Cap (FC)	Curved Cap (CR)	
LINK MINI <i>(LINK MINI)</i>	Full type	Luminaire Colour Anodized (A) White (W) Black (B)	2700K (27)	633lm	PC Frosted Cover <i>(FR)</i>	5.6W (06)	28.4	30	24VDC <i>(24)</i>
			3000K (30)	650lm		11.2W (11)	56.4	58	
			4000K (40)	685lm					
LINK MIDI <i>(LINK MIDI)</i>	Surface Diffused F <i>(SF DFF)</i>	End Cap Colour Anodized (A) White (W) Black (B)			PC Milky Cover <i>(ML)</i>	16.8W (17)	84.4	86	230VAC <i>(230)</i>
						22.4W (22)	112.4	114	
					Microprismatic Cover <i>(MP)</i>	28W (28)	140.4	142	
LINK HV <i>(LINK HV)</i>	Dashed type Surface Diffused D <i>(SF DFD)</i>					33.6W (34)	168.4	170	
						39.2W (39)	196.4	198	
						44.8W (45)	224.4	226	
						Watt / Position			
						11.2W / A1 (A1)	84.4	86	
						5.6W / A2 (A2)	84.4	86	
						11.2W / B1 (B1)	112.4	114	
						11.2W / B2 (B2)	112.4	114	
						11.2W / C1 (C1)	140.4	142	
						16.8W / C2 (C2)	140.4	142	
						16.8W / C3 (C3)	140.4	142	
						22.4W / D1 (D1)	196.4	198	
						16.8W / D2 (D2)	196.4	198	
						28W / D3 (D3)	196.4	198	

* LINK MINI End Cap & Curved End Caps only available in Black & White.

** LINK MINI only available with Flat Cap.

*** LINK MINI & LINK MIDI only available in 24VDC / LINK HV only available in 230VAC.

Full type

 Flat Cap: 28.4 / 56.4 / 84.4 / 112.4 / 140.4 / 168.4 / 196.4 / 224.4cm
 Curved Cap: 30.0 / 58.0 / 86.0 / 114.0 / 142.0 / 170.0 / 198.0 / 226.0cm

Ordering Code Example: LINK MIDI SF DFD-WW-4090-ML-C3-24

Dashed type

Position	Blank	Directional	Flat Cap	Curved Cap
A1			11.2W / 84.4cm	86cm
A2			5.6W / 84.4cm	86cm
B1			11.2W / 112.4cm	114cm
B2			11.2W / 112.4cm	114cm
C1			11.2W / 140.4cm	142cm
C2			16.8W / 140.4cm	142cm
C3			16.8W / 140.4cm	142cm
D1			22.4W / 196.4cm	198cm
D2			16.8W / 196.4cm	198cm
D3			28W / 196.4cm	198cm

