

# LUMITUBE IP67 / IP68

Lumitube is an ultimate solution for exceptional lighting in any environment. For standard lengths or as custom made solution, Lumitube delivers outstanding performance, making it ideal for both IP67 and IP68 applications. Engineered with the highest-quality materials, Lumitube blends functionality with aesthetic appeal with the use of antiglare accessory, ensuring a visually pleasing result.

- Cable Gland & End Cap components: Nickel plated brass for IP67 and INOX-316 for IP68.
- Tube material: Transparent PMMA.
- Ingress Protection: Available in IP67 and IP68.
- L90/B10 >50.000h, 3 Step MacAdam (for monochromatic models).

Lighting management options:


On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth




L90/B10 50.000h

**Available upon request:**


✓ Custom dimensions



IP67

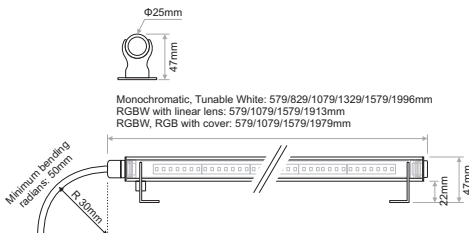

IP68

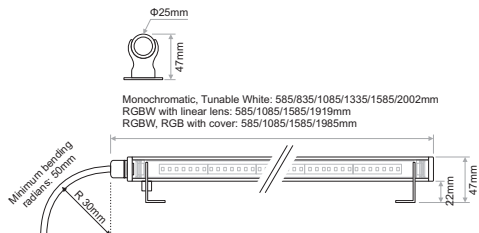



LUMITUBE IP67




IP67

Model	Colour Temperature	CRI	Beam Angle	Watt / Length	Voltage
<b>LUMITUBE IP67*</b> (LUMITUBE IP67)	2000K (20)	80+ (80)	16° Linear lens (16L)	10.5W / 57.9cm (11W058)	24VDC (24)
	2500K (25)		35° Linear lens (35L)	15.8W / 82.9cm (16W083)	
	2700K (27)		55° Linear lens (55L)	21W / 107.9cm (21W108)	
	3000K (30)		100° Frosted Cover (100F)	26.3W / 132.9cm (26W133)	
	4000K (40)		100° Clear Cover (100C)	31.5W / 157.9cm (32W158)	
	5700K (57)		110° Milky Cover (110M)	40.3W / 199.6cm (40W200)	
<b>TUNABLE WHITE</b> Tunable White 2700K-5700K (TW)		80+ (80)	16° Linear lens (16L)	10W / 57.9cm (10W058)	
			35° Linear lens (35L)	15W / 82.9cm (15W083)	
			55° Linear lens (55L)	20W / 107.9cm (20W108)	
			100° Frosted Cover (100F)	25W / 132.9cm (25W133)	
			100° Clear Cover (100C)	30W / 157.9cm (30W158)	
			110° Milky Cover (110M)	38.3W / 199.6cm (38W200)	
<b>RGBW</b> RGBW with linear lens (RGBW)			16° Linear lens (16L)	7.5W / 57.9cm (08W058)	
			35° Linear lens (35L)	15W / 107.9cm (15W108)	
			55° Linear lens (55L)	22.5W / 157.9cm (23W158) 27.5W / 191.3cm (28W191)	
<b>RGBW</b> RGBW with cover (RGBW)			100° Frosted Cover (100F)	9.8W / 57.9cm (10W058)	
			100° Clear Cover (100C)	19.5W / 107.9cm (20W108)	
			110° Milky Cover (110M)	29.5W / 157.9cm (30W158) 37.1W / 197.9cm (37W198)	
<b>RGB</b> RGB with cover (RGB)			100° Frosted Cover (100F)	7.3W / 57.9cm (07W058)	
			100° Clear Cover (100C)	14.5W / 107.9cm (15W108)	
			110° Milky Cover (110M)	21.8W / 157.9cm (22W158) 27.6W / 197.9cm (28W198)	

\* IP67: Short term immersion protection

Ordering Code Example: LUMITUBE IP67-TW-80-100C-15W083-24

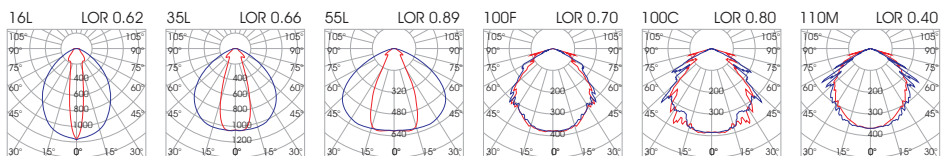




LUMITUBE IP68

LIGHTSOURCE BY  
**NICHIA**  
for ManuChromatic

IP68

Model	Colour Temperature	CRI	Beam Angle	Watt / Length	Voltage
<b>LUMITUBE IP68</b> <i>(LUMITUBE IP68)</i>	2000K <i>(20)</i>	80+ <i>(80)</i>	16° Linear lens <i>(16L)</i>	10.5W / 58.5cm <i>(11W059)</i>	24VDC <i>(24)</i>
	2500K <i>(25)</i>		35° Linear lens <i>(35L)</i>	15.8W / 83.5cm <i>(16W084)</i>	
	2700K <i>(27)</i>		55° Linear lens <i>(55L)</i>	21W / 108.5cm <i>(21W109)</i>	
	3000K <i>(30)</i>		100° Frosted Cover <i>(100F)</i>	26.3W / 133.5cm <i>(26W134)</i>	
	4000K <i>(40)</i>		100° Clear Cover <i>(100C)</i>	31.5W / 158.5cm <i>(32W156)</i>	
	5700K <i>(57)</i>	110° Milky Cover <i>(110M)</i>	40.3W / 200.2cm <i>(40W200)</i>		
	<b>TUNABLE WHITE</b>	80+ <i>(80)</i>	16° Linear lens <i>(16L)</i>	10W / 58.5cm <i>(10W059)</i>	
	Tunable White <i>(TW)</i>		35° Linear lens <i>(35L)</i>	15W / 83.5cm <i>(15W084)</i>	
	2700K~5700K		55° Linear lens <i>(55L)</i>	20W / 108.5cm <i>(20W109)</i>	
			100° Frosted Cover <i>(100F)</i>	25W / 133.5cm <i>(25W134)</i>	
	100° Clear Cover <i>(100C)</i>		30W / 158.5cm <i>(30W156)</i>		
	110° Milky Cover <i>(110M)</i>	38.3W / 200.2cm <i>(38W200)</i>			
<b>RGBW</b>			16° Linear lens <i>(16L)</i>	7.5W / 58.5cm <i>(08W059)</i>	
RGBW with linear lens <i>(RGBW)</i>			35° Linear lens <i>(35L)</i>	15W / 108.5cm <i>(15W109)</i>	
			55° Linear lens <i>(55L)</i>	22.5W / 158.5cm <i>(23W159)</i>	
				27.5W / 191.9cm <i>(28W192)</i>	
<b>RGBW</b>			100° Frosted Cover <i>(100F)</i>	9.8W / 58.5cm <i>(10W059)</i>	
RGBW with cover <i>(RGBW)</i>			100° Clear Cover <i>(100C)</i>	19.5W / 108.5cm <i>(20W109)</i>	
			110° Milky Cover <i>(110M)</i>	29.5W / 158.5cm <i>(30W159)</i>	
				37.1W / 198.5cm <i>(37W199)</i>	
<b>RGB</b>			100° Frosted Cover <i>(100F)</i>	7.3W / 58.5cm <i>(07W059)</i>	
RGB with cover <i>(RGB)</i>			100° Clear Cover <i>(100C)</i>	14.5W / 108.5cm <i>(15W109)</i>	
			110° Milky Cover <i>(110M)</i>	21.8W / 158.5cm <i>(22W159)</i>	
				27.6W / 198.5cm <i>(28W199)</i>	

Ordering Code Example: LUMITUBE IP68-TW-80-100C-15W084-24

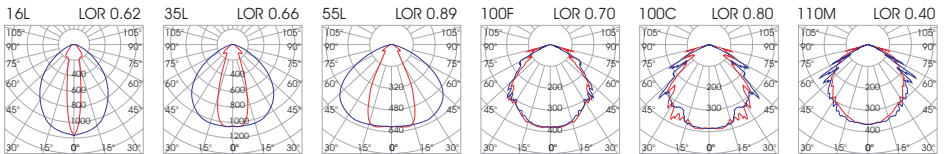

Accessories


Input cables

Input cable with IP68 connectors  
(as standard)



Holders\*

Inox Holders (Left-Right)  
(as standard)



\* INOX holders are not compatible with antiglare option.


Antiglare\*\*

Antiglare accessory (as extra)



Brackets\*

\*One set of antiglare brackets for every 2m.

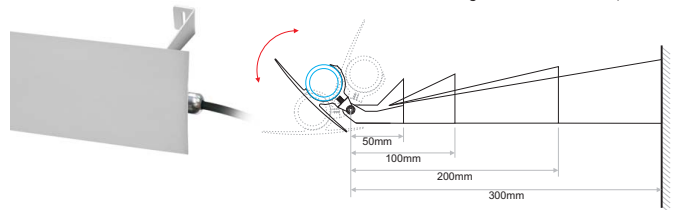

Wall Brackets for antiglare

Fixed 5,10,20,30cm Wall brackets INOX-316 (Set of 2) (as extra)

- ACR.137** AG for Lumitube 58cm Anodized
- ACRW137** AG for Lumitube 58cm White RAL9003 mat
- ACRB137** AG for Lumitube 58cm Black RAL 9005 mat

---

- ACR.138** AG for Lumitube 83cm Anodized
- ACRW138** AG for Lumitube 83cm White RAL9003 mat
- ACRB138** AG for Lumitube 83cm Black RAL 9005 mat

---

- ACR.139** AG for Lumitube 108cm Anodized
- ACRW139** AG for Lumitube 108cm White RAL9003 mat
- ACRB139** AG for Lumitube 108cm Black RAL 9005 mat

---

- ACR.141** AG for Lumitube 133cm Anodized
- ACRW141** AG for Lumitube 133cm White RAL9003 mat
- ACRB141** AG for Lumitube 133cm Black RAL 9005 mat

---

- ACR.142** AG for Lumitube 191cm Anodized
- ACRW142** AG for Lumitube 191cm White RAL9003 mat
- ACRB142** AG for Lumitube 191cm Black RAL 9005 mat

---

- ACR.143** AG for Lumitube 198cm Anodized
- ACRW143** AG for Lumitube 198cm White RAL9003 mat
- ACRB143** AG for Lumitube 198cm Black RAL 9005 mat

---

- ACR.144** AG for Lumitube 200cm Anodized
- ACRW144** AG for Lumitube 200cm White RAL9003 mat
- ACRB144** AG for Lumitube 200cm Black RAL 9005 mat



- ACR.145** 5cm Passivated
- ACRW145** 5cm White RAL9003 mat
- ACRB145** 5cm Black RAL 9005 mat

---

- ACR.146** 10cm Passivated
- ACRW146** 10cm White RAL9003 mat
- ACRB146** 10cm Black RAL 9005 mat

---

- ACR.147** 20cm Passivated
- ACRW147** 20cm White RAL9003 mat
- ACRB147** 20cm Black RAL 9005 mat

---

- ACR.148** 30cm Passivated
- ACRW148** 30cm White RAL9003 mat
- ACRB148** 30cm Black RAL 9005 mat


(RAL colours as extra upon request)

Ground Bracket for antiglare


INOX-316 (Set of 2) (as extra)



- ACR.154** Passivated
- ACRW154** White RAL9003 mat
- ACRB154** Black RAL 9005 mat

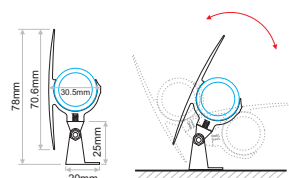

(RAL colours as extra upon request)



\*\* Antiglare accessory must be combined with a bracket option.