


- Nano is a new miniaturized system suitable for highly demanding spaces.
- The system is suitable for surface, pendant, recessed and trimless application.
- Flexibility and easiness in the repositioning of the luminaires.
- It is offered with a variety of accessories.
- Nano system includes: Nano spots, Nano linear spots and Nano linear ambient luminaires.
- Maximum load per system: 150W
- The system is offered in 48 DALI Dimmable or Wireless Dimmable.
- Curved tracks cannot have luminaires on.


NANO Recessed Track

Code	Model	Length	Colour
NAN.041	NANO Recessed Track	2m	Black
NAN.042	NANO Recessed Track	3m	Black
NAN.043	NANO Recessed Track	2m	White
NAN.044	NANO Recessed Track	3m	White





NANO Surface Track

Code	Model	Length	Colour
NAN.001	NANO Surface Track	2m	Black
NAN.002	NANO Surface Track	3m	Black
NAN.003	NANO Surface Track	2m	White
NAN.004	NANO Surface Track	3m	White





NANO Surface Curved Vertical Track

Code	Model	Colour
NAN.050	NANO Surface Curved Vertical Track	Black
NAN.051	NANO Surface Curved Vertical Track	White

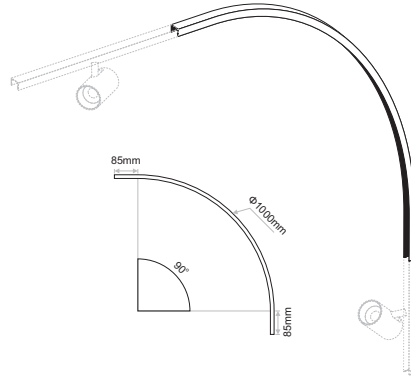












NANO Surface Curved Horizontal Track

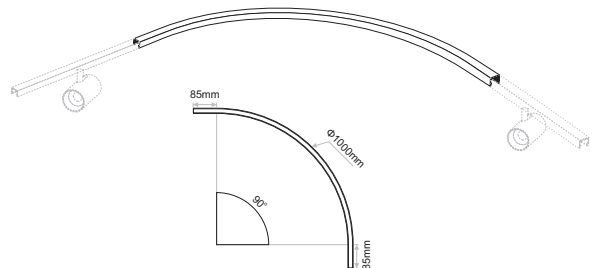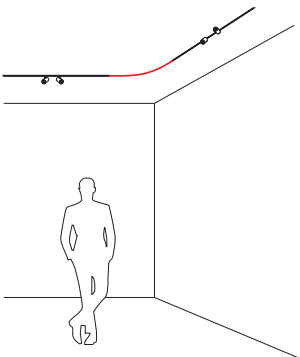Code	Model	Colour
NAN.052	NANO Surface Curved Horizontal Track	Black
NAN.053	NANO Surface Curved Horizontal Track	White






Accessories for NANO System

Code	Description	Colour		
NAN.005	Black Cover 2m	Black		
NAN.006	Black Cover 3m	Black		
NAN.007	White Cover 2m	White		
NAN.008	White Cover 3m	White		
NAN.009	Live End with 0.3m cable	Black		
NAN.010	Live End with 0.3m cable	White		
NAN.011	Adjustable Live Connector for track	Black		
NAN.012	Adjustable Live Connector for track	White		
NAN.015	Extension Line Connector	Black		
NAN.016	Extension Line Connector	White		
NAN.023	Accessory for Trimless Installation	Black		
NAN.024	Accessory for Trimless Installation	White		
ACC.086	Ceiling Suspension Installation 1,5m			
ACC.233	Ceiling Suspension Installation 3m			




Accessories for NANO Recessed

Code	Description	Colour
NAN.045 NAN.046	End Cap for Recessed track End Cap for Recessed track	Black White
NAN.049	Spring for NANO track Recessed	
NAN.054 NAN.055	L CORNER Recessed Ceiling to Ceiling L CORNER Recessed Ceiling to Ceiling	Black White
NAN.056 NAN.057	L CORNER Recessed Ceiling to Wall OUT L CORNER Recessed Ceiling to Wall OUT	Black White
NAN.058 NAN.059	L CORNER Recessed Ceiling to Wall IN L CORNER Recessed Ceiling to Wall IN	Black White



Accessories for NANO Surface

Code	Description	Colour
NAN.013 NAN.014	End Cap for Surface track End Cap for Surface track	Black White
NAN.017 NAN.018	L CORNER Surface Ceiling to Ceiling L CORNER Surface Ceiling to Ceiling	Black White
NAN.019 NAN.020	L CORNER Surface Ceiling to Wall OUT L CORNER Surface Ceiling to Wall OUT	Black White
NAN.021 NAN.022	L CORNER Surface Ceiling to Wall IN L CORNER Surface Ceiling to Wall IN	Black White



NANO SPOT 4W & 6W





- Nano SP are two miniaturized spots of Nano System.
- Available in 4 and 6Watt.
- Rotatable 320 degrees.
- Available in black or white colour.
- UGR<16(50°) / UGR<13(38°) / UGR<11(28°)
- L90/B10 50.000h
- 3SDCM



Model (LED Power)	Watt	CCT	CR180 LED Source	CR190 LED Source	Beam Angle	Type	Colour	Dimming Option
			80 (80)	90 (90)				
NANO SPOT <i>(NANO SP)</i>	3.8W (04)	2700K (27C)	460lm	370lm	28° (28)	Adjustable (AD)	White (WH) Black (BL)	48V PWM Dimmable (DM)
		3000K (30C)	460lm	400lm	38° (38)			
		4000K (40C)	500lm	430lm	50° (50)			
	5000K (50C)	500lm	460lm					
	5.5W (06)	2700K (27C)	670lm	540lm				
		3000K (30C)	670lm	575lm				
4000K (40C)		720lm	625lm					
		5000K (50C)	720lm	670lm				

Ordering Code Example: NANO SP-04-30C-90-38-AD-WH-DM

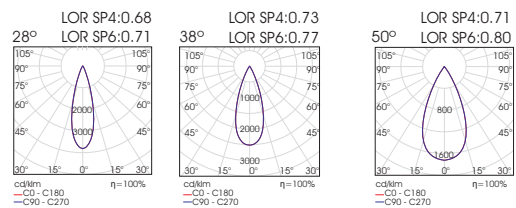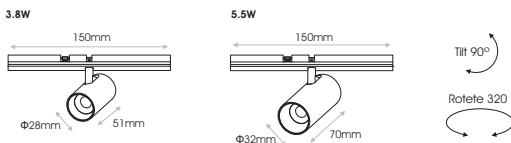









- Nano SP RD is an elegant flat round luminaire of Nano System.
- It is a rotatable 320 degrees.
- Available in black or white colour.
- $UGR < 18(60^\circ)$ / $UGR < 17(48^\circ)$ / $UGR < 19(35^\circ)$ / $UGR < 18(20^\circ)$ / $UGR < 15(13^\circ)$
- L90/B10 50.000h
- 3SDCM



Model (LED Power)	Watt	CCT	CRI80 LED Source	CRI90 LED Source	Beam Angle	Type	Colour	Dimming Option
			80 (80)	90 (90)				
NANO SPOT ROUND (NANO SP RD)	6.7W (07)	2700K (27C)	820lm	660lm	13° (13)	Adjustable (AD)	White (WH) Black (BL)	48V PWM Dimmable (DM)
		3000K (30C)	820lm	705lm	20° (20)			
		4000K (40C)	885lm	760lm	35° (35)			
		5000K (50C)	885lm	820lm	48° (48) 60° (60)			

Ordering Code Example: NANO SP RD-07-30C-90-48-AD-BL-DM






NANO AMBIENT 7W & 13W

- Nano A consists of two linear ambient luminaire of Nano system.
- Available in black or white colour.
- With a length of 300 or 600mm.
- L90/B10 50.000h
- 3SDCM



Model (LED Power)	Watt	CCT	CR190 LED Source	Beam Angle	Type	Colour	Dimming Option
NANO AMBIENT <i>(NANO A)</i>	6.7W (07)	2700K (27B)	615lm	90° (90)	Fixed (FX)	White (WH) Black (BL)	48V PWM Dimmable (DM)
		3000K (30B)	620lm				
		4000K (40B)	630lm				
		5000K (50B)	630lm				
		13.4W (13)	2700K (27B)				
	3000K (30B)	1040lm					
	4000K (40B)	1060lm					
	5000K (50B)	1060lm					

Ordering Code Example: NANO A-13-30B-90-115-FX-BL-DM

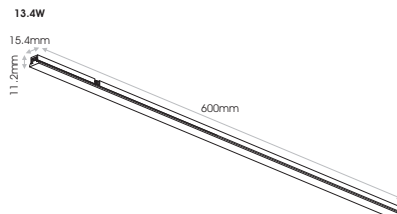

- NANO LS consists of two directional linear luminaires of Nano System.
- Available in black or white colour.
- Available in 33 degrees & 27 degrees for antiglare version.
- With a length of 300 or 600mm.
- UGR<10(33°)
- L90/B10 50.000h
- 3SDCM



Model (LED Power)	Watt	CCT	CRI90 LED Source	Beam Angle	Type	Colour	Dimming Option
NANO LINEAR SPOT <i>(NANO LS)</i>	4.8W (05)	2700K (27C)	460lm	33° (33)	Fixed (FX)	White (WH) Black (BL)	48V PWM Dimmable (DM)
		3000K (30C)	460lm				
		4000K (40C)	470lm				
	5000K (50C)	480lm					
	9.6W (10)	2700K (27C)	920lm				
		3000K (30C)	920lm				
4000K (40C)		960lm					
NANO LINEAR SPOT ANTIGLARE <i>(NANO LS AG)</i>	4.8W (05)	2700K (27C)	460lm	27° (27)	Fixed (FX)	White (WH) Black (BL)	48V PWM Dimmable (DM)
		3000K (30C)	460lm				
		4000K (40C)	470lm				
	5000K (50C)	480lm					
	9.6W (10)	2700K (27C)	920lm				
		3000K (30C)	920lm				
4000K (40C)		960lm					
5000K (50C)	970lm						

Ordering Code Example: NANO LS-10-30C-90-33-FX-BL-DM

