




# OUTLINER 20

Aluminium Profile

- OUTLINER 20 aluminium profile ideal for linear LED lighting applications.
- Variety of accessories.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50).
- Available also in black, white or different RAL colours upon request.





FIXED installation

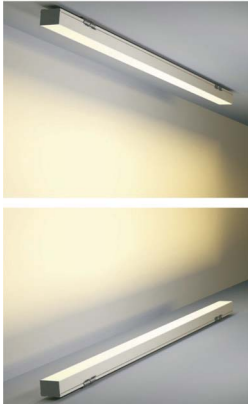

SURFACE installation



WALL BRACKET (Long-Short) installation

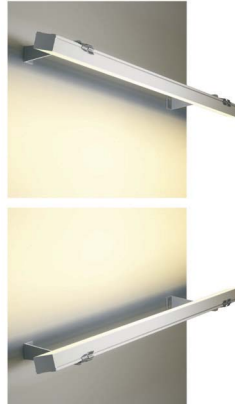

PENDANT installation


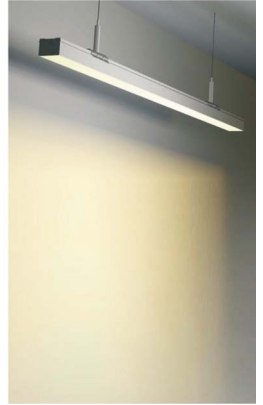




Image	Code	Description	Length	Design-Detail
	<b>PRF.119</b>	OUTLINER 20 alum.prof. / Anodized	2m	
	<b>COV.035</b> <b>COV.036</b> <b>COV.037</b>	POLYCARBONATE CLEAR COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE MICROPRISMATIC COVER	2m 2m 2m	
	<b>CAP.123</b> <b>CAP.124</b>	FRONT CAP (aluminium) for OUTLINER 20 END CAP (aluminium) for OUTLINER 20		
	<b>ELA.008</b> <sup>(1,4)</sup>	STAINLESS STEEL HOLDER for FIXED installation		
	<b>ACC.048</b> <sup>(1)</sup>	BRACKET for SURFACE installation		
	<b>ACC.284</b> <sup>(2)</sup> <b>ACC.285</b> <sup>(2)</sup>	WALL BRACKET LONG (pair) for OUTLINER 20 WALL BRACKET SHORT (pair) for OUTLINER 20		
	<b>ACC.286</b> <sup>(3)</sup> <b>ACC.287</b> <sup>(3)</sup>	CEILING SUSPENSION installation 150cm (per piece) CEILING SUSPENSION installation 300cm (per piece)		

1. Use 2 pcs for lengths up to 100cm. 3 pcs for lengths up to 150cm. 4 pcs for lengths up to 200cm.
2. Use 1 pair for lengths up to 100cm. 1,5 pair for lengths up to 150cm. 2 pairs for lengths up to 200cm.
3. Use 2 pcs for lengths up to 200cm.
4. ELA.008 can be used also as antislipper for vertical installation. Two ELA.008 must be used for every holding, required for the luminaire installation.