

OUTLINER 30

Outliner series is a complete series of custom made linear luminaires with Transparent, Milky Satin or Microprismatic cover. It is available in 4 different widths of 20, 30, 40, 50mm (luminous area widths). It is offered in standard and in custom lengths. The series offers an excellent uniformity with colour consistency.


- Multiple mounting options (fixed, surface, wall brackets or pendant).
- Long & Short bracket accessories available for wall installation.
- L90/B10 >50.000h (for monochromatic models).
- 3 SDCM (for monochromatic models).
- Ingress Protection: IP40

Lighting management options:
On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

L90/B10 >50.000h
for monochromatic models

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours




Seamless




STANDARD




FIXED




SURFACE



WALL BRACKET
(Long/Short)



PENDANT




PRH.018
ANTISLIPPER
for vertical installation
(as extra)


SEAMLESS




FIXED




FIXED ELEVATED

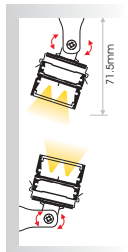


SURFACE

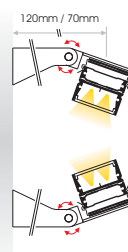

WALL BRACKET
(Long/Short)

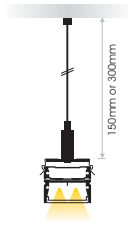

PENDANT



PRH.018
ANTISLIPPER
for vertical installation
(as extra)



PRH.028
COUPLER accessory
(as extra)

Connectors



Input cable with IP connectors
supplied as extra



In-Out cables & waterproof connectors
supplied as extra.



Supply connectors for a luminaire array
(as extra)

- CNC.009** 2 pole connector (monochrome)
- CNC.013** 4 pole connector (RGB)
- CNC.053** 5 pole connector (RGBW)

STANDARD

LIGHTSOURCE BY
NICHIA
for Monochromatic


IP40

Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage
OUTLINER 30 FIXED <i>(OUTLINER30-F)</i>	Anodized <i>(AN)</i>	2000K <i>(20)</i>	≥ 80 <i>(80)</i>	21W / 53cm <i>(21W053)</i>	Transparent <i>(TR)</i> Milky Satin <i>(MS)</i> Microprismatic <i>(MP)</i>	24VDC <i>(24)</i>
	White <i>(WH)</i>	2500K <i>(25)</i>		35W / 86.3cm <i>(35W086)</i>		
	Black <i>(BL)</i>	2700K <i>(27)</i>		42W / 103cm <i>(42W103)</i>		
		3000K <i>(30)</i>		49W / 119.7cm <i>(49W120)</i>		
		4000K <i>(40)</i>		63W / 153cm <i>(63W153)</i>		
OUTLINER 30 SURFACE <i>(OUTLINER30-S)</i>		5700K <i>(57)</i>		84W / 203cm <i>(84W203)</i>		
	<i>RGBWW / RGBCW / RGB</i>					
	<i>Colour</i>		<i>Watt / Length</i>			
OUTLINER 30 SHORT BRACKET 7cm <i>(OUTLINER30-B1)</i>	OUTLINER 30 LONG BRACKET 12cm <i>(OUTLINER30-B2)</i>	OUTLINER 30 PENDANT <i>(OUTLINER30-P1) H:150cm</i> <i>(OUTLINER30-P2) H:300cm</i>	RGBWW <i>(RGBWW)</i>		27W / 53cm <i>(27W053)</i>	
			RGBCW <i>(RGBCW)</i>		46.2W / 88.7cm <i>(46W089)</i>	
			84LED/m		54W / 103cm <i>(54W103)</i>	
					65.6W / 124.4cm <i>(66W124)</i>	
					81W / 153cm <i>(81W153)</i>	
					108W / 203cm	
			RGBWW <i>(RGBWW)</i>		19.4W / 53cm <i>(19W053)</i>	
			RGBCW <i>(RGBCW)</i>		31.2W / 83cm <i>(31W083)</i>	
			60LED/m**		39W / 103cm <i>(39W103)</i>	
					46.8W / 123cm <i>(47W123)</i>	
					58.4W / 153cm <i>(58W153)</i>	
					78W / 203cm <i>(78W203)</i>	
RGB <i>(RGB96)</i>		23W / 53cm <i>(23W053)</i>				
96LED/m		40.2W / 90.5cm <i>(40W091)</i>				
		46W / 103cm <i>(46W103)</i>				
		54.6W / 121.7cm <i>(55W122)</i>				
		69W / 153cm <i>(69W153)</i>				
		92W / 203cm <i>(92W203)</i>				
RGB <i>(RGB60)</i>		14.4W / 53cm <i>(14W053)</i>				
60LED/m**		23.2W / 83cm <i>(23W083)</i>				
		29W / 103cm <i>(29W103)</i>				
		34.8W / 123cm <i>(35W123)</i>				
		43.4W / 153cm <i>(43W153)</i>				
		58W / 203cm <i>(58W203)</i>				
RGB <i>(RGB30)</i>		7.2W / 53cm <i>(07W053)</i>				
30LED/m**		11.4W / 83cm <i>(11W083)</i>				
		14.4W / 103cm <i>(14W103)</i>				
		17.2W / 123cm <i>(17W123)</i>				
		21.6W / 153cm <i>(22W153)</i>				
		28.8W / 203cm <i>(29W203)</i>				
						12VDC <i>(12)</i>

* Available in other colours or/and power upon request.

** The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: *OUTLINER30-F-AN-RGB60-35W123-MP-24*

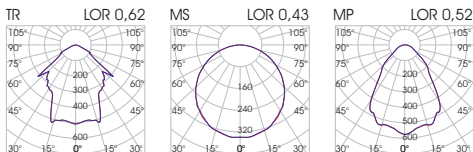

SEAMLESS



IP40

Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length**	Type	Voltage
OUTLINER 30 SEAMLESS FIXED (OUTLINER30-SF)	Anodized (AN)	2000K (20)	≥ 80 (80)	21W / 50,3cm (21W050)	Transparent (TR) Milky Satin (MS) Micropismatic (MP)	24VDC (24)
	White (WH)	2500K (25)		35W / 83,7cm (35W084)		
	Black (BL)	2700K (27)		42W / 100,3cm (42W100)		
	3000K (30)	49W / 117cm (49W117)				
	4000K (40)	63W / 150,3cm (63W150)				
OUTLINER 30 SEAMLESS FIXED ELEVATED (OUTLINER30-SFE)		5700K (57)	84W / 200,3cm (84W200)			
OUTLINER 30 SEAMLESS SURFACE (OUTLINER30-SS)						
OUTLINER 30 SEAMLESS SHORT BRACKET 7.5cm (OUTLINER30-SB1)						
OUTLINER 30 SEAMLESS LONG BRACKET 12.5cm (OUTLINER30-SB2)						
OUTLINER 30 SEAMLESS PENDANT (OUTLINER30-SP1) H:150cm (OUTLINER30-SP2) H:300cm						
RGBWW / RGBCW / RGB						
		Colour		Watt* / Length**		
		RGBWW (RGBWW)		27W / 50,3cm (27W050)		
		RGBCW (RGBCW)		46.2W / 86cm (46W086)		
		84LED/m		54W / 100,3cm (54W100)		
				65.6W / 121,7cm (66W122)		
				81W / 150,3cm (81W150)		
				108W / 200,3cm (108W200)		
		RGBWW (RGBWW)		19.4W / 50,3cm (19W050)		
		RGBCW (RGBCW)		31.2W / 80,3cm (31W080)		
		60LED/m***		39W / 100,3cm (39W100)		
				46.8W / 120,3cm (47W120)		
				58.4W / 150,3cm (58W150)		
				78W / 200,3cm (78W200)		
		RGB (RGB96)		23W / 50,3cm (23W050)		
		96LED/m		40.2W / 87,8cm (40W088)		
				46W / 100,3cm (46W100)		
				54.6W / 119cm (55W119)		
				69W / 150,3cm (69W150)		
				92W / 200,3cm (92W200)		
		RGB (RGB60)		14.4W / 50,3cm (14W050)		
		60LED/m***		23.2W / 80,3cm (23W080)		
				29W / 100,3cm (29W100)		
				34.8W / 120,3cm (35W120)		
				43.4W / 150,3cm (43W150)		
				58W / 200,3cm (58W200)		
		RGB (RGB30)		7.2W / 50,3cm (07W050)		
		30LED/m***		11.4W / 80,3cm (11W080)		
				14.4W / 100,3cm (14W100)		
				17.2W / 120,3cm (17W120)		
				21.6W / 150,3cm (22W150)		
				28.8W / 200,3cm (29W200)		
						12VDC (12)

* Available in other colours or/and power upon request.

** Length without end caps for seamless installation (Add 2mm for each end cap)

***The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: OUTLINER30-40SS-AN-RGB60-35W120-MS-24

