

# OUTLINER 40

Outliner series is a complete series of custom made linear luminaires with Transparent, Milky Satin or Microprismatic cover. It is available in 4 different widths of 20, 30, 40, 50mm (luminous area widths). It is offered in standard and in custom lengths. The series offers an excellent uniformity with colour consistency.

- Multiple mounting options (fixed, surface, wall brackets or pendant).
- Long & Short bracket accessories available for wall installation.
- L90/B10 >50.000h (for monochromatic models).
- 3 SDCM (for monochromatic models).
- Ingress Protection: IP40

Lighting management options:  
On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

**L90/B10 >50.000h**  
for monochromatic models

***Available upon request:***

- ✓ Custom dimensions
- ✓ Custom luminaire colours




Seamless


## STANDARD



FIXED

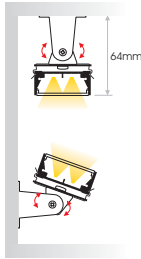


SURFACE

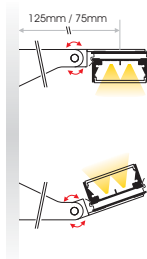

WALL BRACKET  
(Long/Short)



PENDANT




**PRH.019**  
ANTISLIPPER  
for vertical installation  
(as extra)


## SEAMLESS




FIXED




FIXED ELEVATED

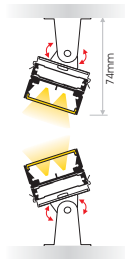


SURFACE

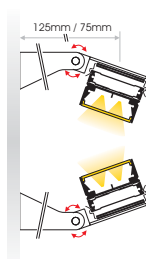

WALL BRACKET  
(Long/Short)



PENDANT



**PRH.019**  
ANTISLIPPER  
for vertical installation  
(as extra)



**PRH.029**  
COUPLER accessory  
(as extra)



## Connectors



Input cable with IP connectors  
supplied as extra



In-Out cables & waterproof connectors  
supplied as extra.



Supply connectors for a luminaire array  
(as extra)

- CNC.009** 2 pole connector (monochrome)
- CNC.013** 4 pole connector (RGB)
- CNC.053** 5 pole connector (RGBW)


STANDARD



Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage
<b>OUTLINER 40 FIXED</b> (OUTLINER40-F)  <b>OUTLINER 40 SURFACE</b> (OUTLINER40-S)  <b>OUTLINER 40 SHORT BRACKET 7.5cm</b> (OUTLINER40-B1)  <b>OUTLINER 40 LONG BRACKET 12.5cm</b> (OUTLINER40-B2)  <b>OUTLINER 40 PENDANT</b> (OUTLINER40 P1) H:150cm (OUTLINER40 P2) H:300cm	Anodized (AN)	2000K (20)	≥ 80 (80)	21W / 53cm (21W053)	Transparent (TR) Milky Satin (MS) Microprismatic (MP)	24VDC (24)
	White (WH)	2500K (25)		35W / 86.3cm (35W086)		
	Black (BL)	2700K (27)		42W / 103cm (42W103)		
		3000K (30)		49W / 119.7cm (49W120)		
		4000K (40)		63W / 153cm (63W153)		
		5700K (57)		84W / 203cm (84W203)		
RGBWW / RGBCW / RGB						
		Colour		Watt / Length		
		RGBWW (RGBWW)		27W / 53cm (27W053)		
		RGBCW (RGBCW)		46.2W / 88.7cm (46W089)		
		84LED/m		54W / 103cm (54W103)		
				65.6W / 124.4cm (66W124)		
				81W / 153cm (81W153)		
				108W / 203cm		
		RGBWW (RGBWW)		19.4W / 53cm (19W053)		
		RGBCW (RGBCW)		31.2W / 83cm (31W083)		
		60LED/m**		39W / 103cm (39W103)		
				46.8W / 123cm (47W123)		
				58.4W / 153cm (58W153)		
				78W / 203cm (78W203)		
		RGB (RGB95)		23W / 53cm (23W053)		
		96LED/m		40.2W / 90.5cm (40W091)		
				46W / 103cm (46W103)		
				54.6W / 121.7cm (55W122)		
				69W / 153cm (69W153)		
				92W / 203cm (92W203)		
		RGB (RGB60)		14.4W / 53cm (14W053)		
		60LED/m**		23.2W / 83cm (23W083)		
				29W / 103cm (29W103)		
				34.8W / 123cm (35W123)		
				43.4W / 153cm (43W153)		
				58W / 203cm (58W203)		
		RGB (RGB30)		7.2W / 53cm (07W053)		12VDC (12)
		30LED/m**		11.4W / 83cm (11W083)		
				14.4W / 103cm (14W103)		
				17.2W / 123cm (17W123)		
				21.6W / 153cm (22W153)		
				28.8W / 203cm (29W203)		

\* Available in other colours or/and power upon request.  
 \*\* The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: OUTLINER40-F-AN-RGB60-35W123-MP-24

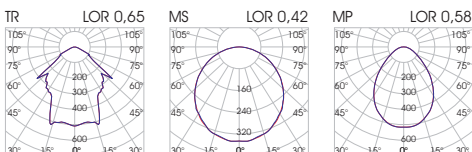


**SEAMLESS**


Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length**	Type	Voltage
<b>OUTLINER 40 SEAMLESS FIXED</b> (OUTLINER40-SF)	Anodized (AN)	2000K (20)	≥ 80 (80)	21W / 50,3cm (21W050)	Transparent (TR) Milky Satin (MS) Microprismatic (MP)	24VDC (24)
	White (WH)	2500K (25)		35W / 83,7cm (35W084)		
	Black (BL)	2700K (27)		42W / 100,3cm (42W100)		
		3000K (30)		49W / 117cm (49W117)		
		4000K (40)		63W / 150,3cm (63W150)		
		5700K (57)		84W / 200,3cm (84W200)		
<b>OUTLINER 40 SEAMLESS FIXED ELEVATED</b> (OUTLINER40-SFE)						
<b>OUTLINER 40 SEAMLESS SURFACE</b> (OUTLINER40-SS)						
<b>OUTLINER 40 SEAMLESS SHORT BRACKET 7.5cm</b> (OUTLINER40-SB1)						
<b>OUTLINER 40 SEAMLESS LONG BRACKET 12.5cm</b> (OUTLINER40-SB2)						
<b>OUTLINER 40 SEAMLESS PENDANT</b> (OUTLINER40-SP1) H:150cm (OUTLINER40-SP2) H:300cm						
<i>RGBWW / RGBCW / RGB</i>						
				<b>Colour</b>	<b>Watt* / Length**</b>	
				RGBWW (RGBWW)	27W / 50,3cm (27W050)	
				RGBCW (RGBCW)	46.2W / 86cm (46W086)	
				84LED/m	54W / 100,3cm (54W100)	
					65.6W / 121,7cm (66W122)	
					81W / 150,3cm (81W150)	
					108W / 200,3cm (108W200)	
				RGBWW (RGBWW)	19.4W / 50,3cm (19W050)	
				RGBCW (RGBCW)	31.2W / 80,3cm (31W080)	
				60LED/m***	39W / 100,3cm (39W100)	
					46.8W / 120,3cm (47W120)	
					58.4W / 150,3cm (58W150)	
					78W / 200,3cm (78W200)	
				RGB (RGB96)	23W / 50,3cm (23W050)	
				96LED/m	40.2W / 87,8cm (40W088)	
					46W / 100,3cm (46W100)	
					54.6W / 119cm (55W119)	
					69W / 150,3cm (69W150)	
					92W / 200,3cm (92W200)	
				RGB (RGB60)	14.4W / 50,3cm (14W050)	
				60LED/m***	23.2W / 80,3cm (23W080)	
					29W / 100,3cm (29W100)	
					34.8W / 120,3cm (35W120)	
					43.4W / 150,3cm (43W150)	
					58W / 200,3cm (58W200)	
				RGB (RGB30)	7.2W / 50,3cm (07W050)	
				30LED/m***	11.4W / 80,3cm (11W080)	
					14.4W / 100,3cm (14W100)	
					17.2W / 120,3cm (17W120)	
					21.6W / 150,3cm (22W150)	
					28.8W / 200,3cm (29W200)	

\* Available in other colours or/and power upon request.

\*\* Length without end caps for seamless installation (Add 2mm for each end cap)

\*\*\*The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

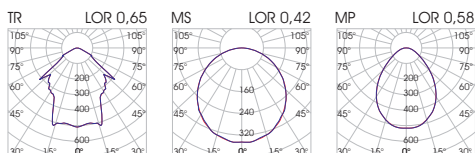

Ordering Code Example: OUTLINER40-SS-AN-RGB60-58W200-MS-24