




- Reform 30 is a complete series of miniaturized downlights available recessed, trimless or surface.
- It is available in round form.
- Power consumption: 3watt and 6watt.
- Beam angle varies from 12 to 50 degrees.
- Accessories available: honeycomb.
- Luminaire material: aluminium construction/ PC parts.
- It is offered in white and/or black colour as standard but RAL colours also are available on request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<14 /black inner ring).

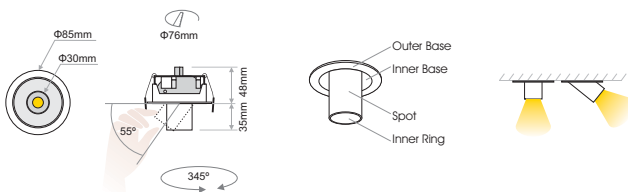


Model	LED Power	CCT*	CRI80, CRI90 LED Source	Beam Angle	Type	Luminaire Colour	Dimming Option	Accessories
			80 (80) 90 (90)					
REFORM 30 Recessed <i>(REFORM 30 RC)</i>	3W (3)	2700K (27C)	310lm 250lm	12° (12)	Adjustable (AD)	(XXXX) Outer Base White (W) Black (B) Inner Base White (W) Black (B) Spot White (W) Black (B) Inner Ring White (W) Black (B)	Without Driver (00)	(XX) Standard (0) Honeycomb (1) Softening lens (2) Extras No Extras (0) Emergency (1)
		3000K (30C)	310lm 265lm				Non Dimmable (ND)	
		4000K (40C)	330lm 290lm				Analogue (1-10V) (A1)	
		5000K (50C)	360lm 310lm				DMX (DX)	
							DALI (DL)	
							Push Button (PB)	
	5.8W (6)	2700K (27C)	615lm 500lm	28° (28) 36° (36) 50° (50)			Phase Cut (PC)	
		3000K (30C)	615lm 530lm				Wireless ** (WL)	
		4000K (40C)	665lm 575lm					
		5000K (50C)	715lm 615lm					
3W (3)	2700K (27C)	396lm 320lm	28° (28) 36° (36) 50° (50)					
	3000K (30C)	396lm 342lm						
	4000K (40C)	428lm 369lm						
	5000K (50C)	428lm 396lm						
6.3W (6)	2700K (27C)	669lm 540lm	28° (28) 36° (36) 50° (50)					
	3000K (30C)	669lm 577lm						
	4000K (40C)	722lm 623lm						
	5000K (50C)	722lm 669lm						

* Models with CCTs of 3500K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: REFORM 30 RC-3-40C-80-36-AD-WBWB-00-00



Inner ring colour:
BLACK

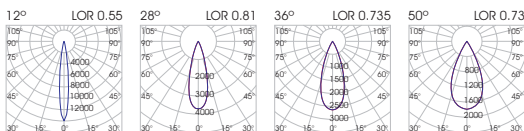

Inner ring colour:
WHITE

