



- Reform 52 is a complete series of miniaturized downlights available recessed, trimless or surface.
- It is available in round form.
- Power consumption: 8.2 watt and 12 watt.
- Beam angle varies from 6 to 44 degrees.
- Accessories available: honeycomb.
- Luminaire material: aluminium construction/ PC parts.
- It is offered in white and/or black colour as standard but RAL colours also are available on request.
- Driver, Emergency kit, battery replacement accessibility of emergency kit should be considered as the kit does not pass through the Trimless luminaire cutout.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR < 12 /black inner ring).
- Constant current 350mA @8.2W / 700mA @ 12W.

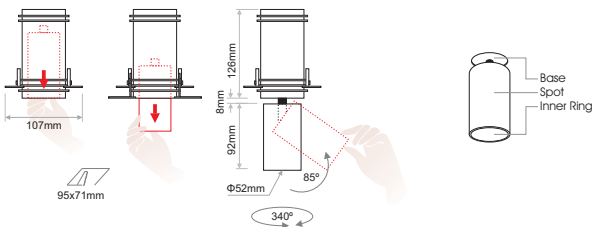


Model	LED Power	CCT*	CRI80, CRI90 LED Source		Beam Angle	Type	Luminaire Colour	Dimming Option	Accessories
			80 (80)	90 (90)					
REFORM 52 IN-OUT Trimless <i>(REFORM 52 IO TR)</i>	8.2W (8)	2700K (27C)	779lm	628lm	6° (06)	Adjustable (AD)	(XXX) ↑ Base White (W) Black (B) Spot White (W) Black (B) Inner Ring White (W) Black (B)	Without Driver (00)	(XX) ↑ Standard (0) Honeycomb (1) Line spread lens (2) Softening lens (3) EXTRAS No Extras (0) Emergency (1)
		3000K (30C)	779lm	673lm					
		4000K (40C)	841lm	726lm					
	12W (12)	2700K (27C)	1590lm	1380lm	21° (21)				
		3000K (30C)	1710lm	1485lm	33° (33)				
		4000K (40C)	1830lm	1590lm	44° (44)				
		5000K (50C)	903lm	779lm					

* Models with CCTs of 3500K & 6500K are available upon request.

Ordering Code Example:
REFORM 52 IO TR-12-40C-80-33-AD-WWB-00-01



Inner ring colour:
BLACK

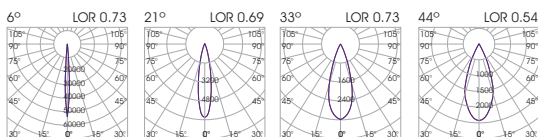

Inner ring colour:
WHITE

