





- Reform 52 is a complete series of downlights available recessed, trimless or surface.
- It is available in round form.
- Power consumption : 12watt and 8.2watt.
- Beam angle varies from 6 to 44 degrees.
- Accessories available: honeycomb, line spread lens or softening lens.
- Luminaire material: aluminium construction/ PC parts.
- It is offered in white and/or black colour as standard but RAL colours also are available on request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<12 /black inner ring).

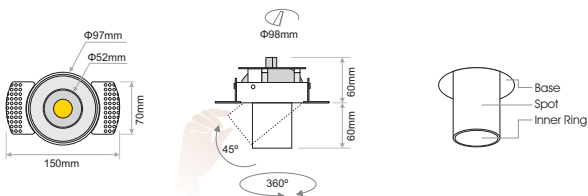


Model	LED Power	CCT*	CRI80, CRI90 LED Source	Beam Angle	Type	Luminaire Colour	Dimming Option	Accessories
			80 (80) 90 (90)					
REFORM 52 Trimless <i>(REFORM 52 TR)</i>	8.2W (8)	2700K (27C)	779lm 628lm	6° (06)	Adjustable (AD)	Base White (W) Black (B) Spot White (W) Black (B) Inner Ring White (W) Black (B)	Without Driver (00)	Standard (0) Honeycomb (1) Line spread lens (2) Softening lens (3) EXTRAS No Extras (0) Emergency (1)
		3000K (30C)	779lm 673lm				Non Dimmable (ND)	
		4000K (40C)	841lm 726lm				Analogue (1-10V) (A1)	
	12W (12)	2700K (27C)	1590lm 1380lm	21° (21)			DMX (DX)	
		3000K (30C)	1710lm 1485lm	33° (33)			DALI (DL)	
		4000K (40C)	1830lm 1590lm	44° (44)			Push Button (PB)	
5000K (50C)	1710lm 1590lm		Phase Cut (PC)	Wireless ** (WL)				

* Models with CCTs of 3500K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: REFORM 52 TR-12-40C-80-33-AD-WWB-00-01



Inner ring colour:
BLACK

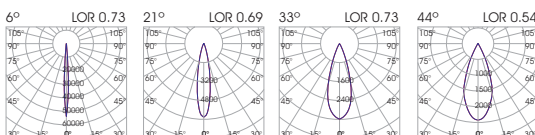

Inner ring colour:
WHITE

