

- Reform 75 is series of downlights available recessed or surface.
- It is available in round form.
- Power consumption : 23.5watt and 18watt.
- Beam angle varies from 17 to 50 degrees.
- Accessories available: honeycomb, line spread lens or softening lens.
- Luminaire material: aluminium construction/ PC parts.
- It is offered in white and/or black colour as standard but RAL colours also are available on request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<15 /black inner ring).






| Model | LED Power | CCT* | CRI80, CRI90 LED Source | Beam Angle | Type | Luminaire Colour | Dimming Option | Accessories |
|---|-------------------|-------------|----------------------------|------------------|-----------------|--|---------------------|--|
| | | | 80 (80) 90 (90) | | | | | |
| REFORM 75 Recessed Spot <i>(REFORM 75 RCSP)</i> | 18W (18) | 2700K (27C) | 2067lm 1794lm | 17° (17) | Adjustable (AD) | Base White (W) Black (B) Spot White (W) Black (B) Inner Ring White (W) Black (B) | Without Driver (00) | Standard (0) Honeycomb (1) Line spread lens (2) Softening lens (3) EXTRAS No Extras (0) Emergency (1) |
| | | 3000K (30C) | 2223lm 1931lm | 27° (27) | | | Non Dimmable (ND) | |
| 4000K (40C) | 2379lm 2067lm | 50° (50) | Analogue (1-10V) (A1) | | | | | |
| 5000K (50C) | 2223lm 2067lm | | DMX (DX) | | | | | |
| | | | | DALI (DL) | | | | |
| | | | | Push Button (PB) | | | | |
| | 23.5W (24) | 2700K (27C) | 2919lm 2409lm | | | Phase Cut (PC) | | |
| | | 3000K (30C) | 3102lm 2512lm | | | Wireless ** (WL) | | |
| | | 4000K (40C) | 3192lm 2663lm | | | | | |
| | | 5000K (50C) | 3230lm 2791lm | | | | | |


* Models with CCTs of 3500K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: REFORM 75 RCSP-18-40C-80-50-AD-WWB-00-10

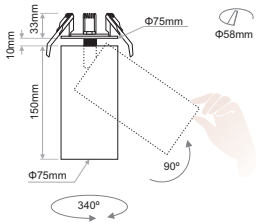

Inner ring colour:
BLACK

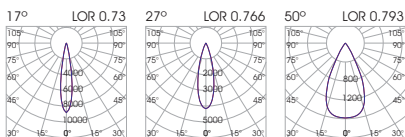

Inner ring colour:
WHITE

