



- SOUL is a series of recessed downlights.
- It is available either round or square.
- It is either fixed or adjustable depending on the model.
- It is available in standard or deep version offering extra visual comfort.
- Power consumption: varies from 3 to 18 watt.
- Beam angle: varies from 9 to 50 degrees.
- SOUL DEEP version is also available for LED lamps.
- Accessories available: honeycomb, linear spread lens, softening lens.
- Luminaire outer trim material: aluminium.
- Outer trim available in black or white as standard but custom colours also available upon request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<15 for DEEP version models).
- Selection of IP protection: either IP20 or IP54 (face only).
- Soul is also offered with an ingress protection rate IP65 (face only).
- Soul Mini: constant current 350mA @3W / 500mA @4.3W.

SOUL



SOUL MINI



SOUL




LD7, ST6, ST12, ST18, NB6, NB8, ZM6, ZM13



WD6, WD12, TW6, TW12



Name	Shape	Model	CCT	CRI80, CRI90 LED Source	Beam Angle	Luminaire Colour: Trim/Inner Case**	Dimming Option	Accessories
				80 (80) 90 (90)				
SOUL (SOUL)	Round (RD)	Low Depth 7W (LD7)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	930lm 960lm 1020lm 1020lm	762lm 792lm 840lm 840lm	30° (30) DEEP** 27° (27)	White (WH) Black (BL) White/White (WW) White/Black (WB) Black/Black (BB) Black/White (BW)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless*** (WL)
SOUL DEEP (SOUL DEEP)	Square (SQ)							
SOUL ADJ (SOUL A)		Standard 6.2W (ST6)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	704lm 713lm 760lm 736lm	568lm 608lm 656lm 704lm	19° (19) 35° (35) 50° (50) DEEP** 16° (16)		
SOUL ADJ DEEP (SOUL A DEEP)						30° (30) 45° (45)		
SOUL IP65 (SOUL 65)		Standard 12.2W (ST12)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	1590lm 1710lm 1830lm 1710lm	1380lm 1485lm 1590lm 1590lm			
SOUL IP65 DEEP (SOUL 65 DEEP)		Standard 18W (ST18)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	2067lm 2223lm 2379lm 2223lm	1794lm 1931lm 2067lm 2067lm			
		Narrow Beam 6W (NB6)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	616lm 616lm 665lm 714lm	497lm 532lm 574lm 616lm	9° (09)		
		Narrow Beam 8W (NB8)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	792lm 792lm 855lm 918lm	639lm 684lm 738lm 792lm			
		Zoom 6.4W (ZM6)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	704lm 713lm 760lm 736lm	568lm 608lm 656lm 704lm	22°-50° (2250)		
		Zoom 13W (ZM13)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	1306lm 1360lm 1435lm 1453lm	1098lm 1150lm 1236lm 1236lm			
		Warm Dimming 0.2-6W (WD6)	1800K-3000K (1830B)	636lm	518lm	19° (19) 35° (35) 50° (50) DEEP** 16° (16)		
		Warm Dimming 12W (WD12)	1800K-3000K (1830B)	1246lm	1045lm	30° (30) 45° (45)		
		Tunable White 5.9W (TW6)	2700K-5000K (2750B)	585lm	(both CCT's driven)			
		Tunable White 11.5W (TW12)	2700K-5000K (2750B)	987lm	(both CCT's driven)			
							Analogue (1-10V) (A1) DALI (DL) Phase Cut (PC) Wireless*** (WL)	
							DALI (DL) Wireless*** (WL)	

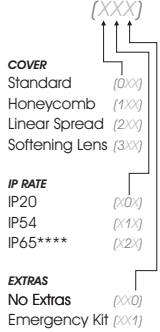

*Beam angle only for DEEP version.
** Inner Case applicable only for DEEP versions.
*** The wireless dimming option includes driver and Bluetooth dimming accessory.
**** Applicable only for SOUL IP65/SOUL IP65 DEEP.

Ordering Code Example: SOUL DEEP-RD-ST18-30C-80-30-WW-DL-100



SOUL MINI


Name	Shape	Model	CCT	CRI80, CRI90 LED Source	Beam Angle	Luminaire Colour: Trim/Inner Case**	Dimming Option	Accessories
				80 (80) 90 (90)				
SOUL MINI <i>(SOUL MINI)</i>	Round <i>(RD)</i>	Standard	2700K <i>(27C)</i>	396lm 320lm	27° <i>(27)</i>	White <i>(WH)</i>	Without Driver <i>(00)</i>	<p>COVER</p> <ul style="list-style-type: none"> Standard <i>(00)</i> Honeycomb <i>(10)</i> Linear Spread <i>(20)</i> Softening Lens <i>(30)</i> <p>IP RATE</p> <ul style="list-style-type: none"> IP20 <i>(0)</i> IP54 <i>(1)</i> IP65*** <i>(2)</i> <p>EXTRAS</p> <ul style="list-style-type: none"> No Extras <i>(00)</i> Emergency Kit <i>(001)</i>
		3W	3000K <i>(30C)</i>	396lm 342lm	35° <i>(35)</i>	Black <i>(BL)</i>	Non Dimmable <i>(ND)</i>	
SOUL MINI DEEP <i>(SOUL MINI DEEP)</i>	Square <i>(SQ)</i>		4000K <i>(40C)</i>	428lm 369lm	47° <i>(47)</i>	White/White <i>(WW)</i>		
			5000K <i>(50C)</i>	428lm 396lm		White/Black <i>(WB)</i>		
SOUL MINI ADJ <i>(SOUL MINI A)</i>		Standard	2700K <i>(27C)</i>	528lm 426lm	DEEP* 25° <i>(25)</i>	Black/Black <i>(BB)</i>		
		4.3W	3000K <i>(30C)</i>	528lm 456lm	30° <i>(30)</i>	Black/White <i>(BW)</i>		
SOUL MINI ADJ DEEP <i>(SOUL MINI A DEEP)</i>			4000K <i>(40C)</i>	570lm 492lm	38° <i>(38)</i>			
			5000K <i>(50C)</i>	570lm 528lm				
SOUL MINI IP65 <i>(SOUL MINI 65)</i>		Narrow	2700K <i>(27C)</i>	440lm 380lm	13° <i>(13)</i>			
		Beam 4W	3000K <i>(30C)</i>	475lm 410lm				
SOUL MINI IP65 DEEP <i>(SOUL MINI 65 DEEP)</i>			4000K <i>(40C)</i>	510lm 410lm				
			5000K <i>(50C)</i>	510lm 440lm				

*Beam angle only for DEEP version.

** Inner Case applicable only for DEEP versions.

*** Applicable only for SOUL IP65/SOUL IP65 DEEP

**** Emergency option and battery replacement accessibility of the emergency kit should be considered as the kit does not pass through the luminaire cutout. Emergency option can be applied to 2-5 luminaires depending on the driver.



Ordering Code Example: *SOUL MINI DEEP-RD-ST4-30C-80-38-WB-DL-100*

SOUL DEEP LL


Model	Outer Trim	Luminaire Colour:	Lamp Holder	Accessories
SOUL DEEP LL <i>(SOUL DEEP LL)</i>	Round <i>(RD)</i> Square <i>(SQ)</i>	White/White <i>(WW)</i> White/Black <i>(WB)</i> Black/Black <i>(BB)</i> Black/White <i>(BW)</i>	GU10 (max 7.5W) (G1)	<p>COVER</p> <ul style="list-style-type: none"> Standard <i>(0)</i> Honeycomb <i>(1)</i> Linear Spread <i>(2)</i> Softening Lens <i>(3)</i> <p>IP RATE</p> <ul style="list-style-type: none"> IP20 <i>(0)</i> IP54 <i>(1)</i> IP65* <i>(2)</i>
SOUL ADJ DEEP LL <i>(SOUL A DEEP LL)</i>				
SOUL IP65 DEEP LL <i>(SOUL 65 DEEP LL)</i>				



* Applicable only for SOUL IP65 DEEP

Ordering Code Example: *SOUL A DEEP LL-RD-WW-G-1-10*




SOUL

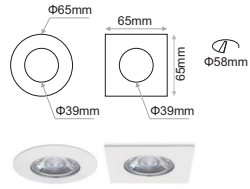

SOUL






SOUL DEEP

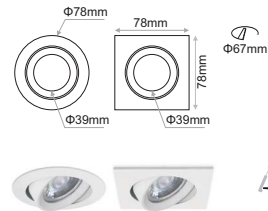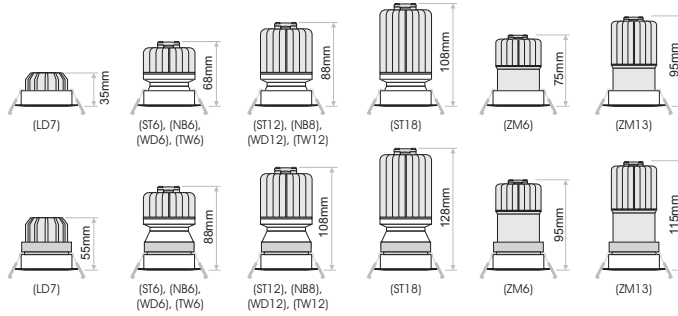

SOUL ADJ





SOUL ADJ DEEP

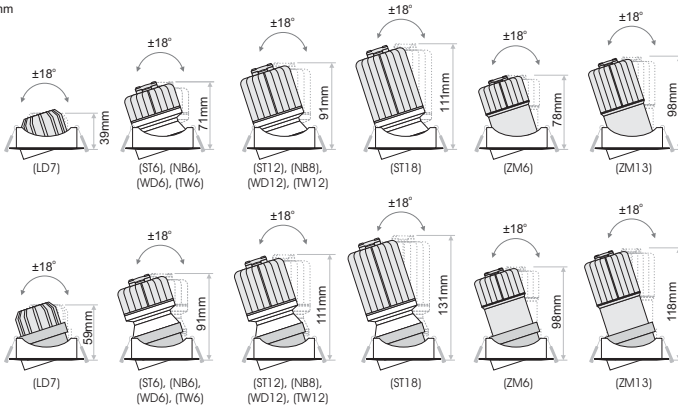


SOUL IP65



SOUL IP65 DEEP

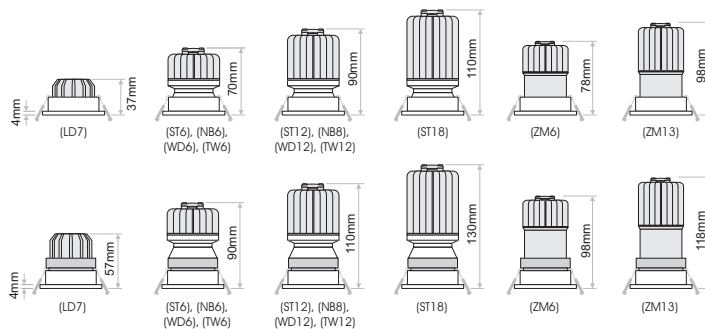


SOUL MINI




SOUL MINI





SOUL MINI DEEP




SOUL MINI ADJ

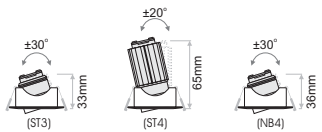


SOUL MINI ADJ DEEP

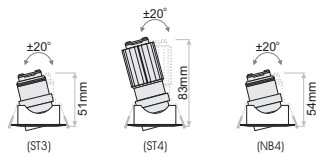

SOUL MINI IP65

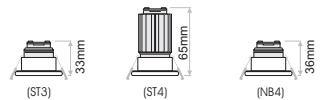


SOUL MINI IP65 DEEP

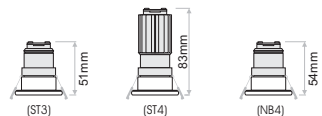


SOUL

LD7

SOUL / SOUL ADJ
LOR 0.67 / 0.58
30°




SOUL DEEP BL / SOUL ADJ DEEP WH
LOR 0.46 / 0.49
27°




ST6/ ST12/ ST18/ WD6 /WD12 /TW6 /TW12


SOUL / SOUL ADJ
LOR 0.79 / 0.71
19°



LOR 0.87 / 0.77
35°




LOR 0.83 / 0.80
50°




SOUL DEEP BL / SOUL ADJ DEEP WH


LOR 0.62 / 0.51
16°



LOR 0.53 / 0.57
30°




LOR 0.68 / 0.63
45°




NB6 / NB8

SOUL / SOUL ADJ





SOUL DEEP BL / SOUL ADJ DEEP BL





ZM6 / ZM13

SOUL / SOUL ADJ



SOUL DEEP BL / SOUL ADJ DEEP BL




SOUL MINI


ST3 / ST4

SOUL MINI / SOUL MINI ADJ


LOR 0.82 / 0.76



LOR 0.84 / 0.81




LOR 0.74 / 0.72




SOUL MINI DEEP BL / SOUL MINI ADJ DEEP WH

LOR 0.60 / 0.62



LOR 0.60 / 0.60



LOR 0.50/ 0.57

