


- TALUS adjustable recessed downlight available in white or black colour.

Monochromatic, TW, WD

- 3 SDCM
- L90/B10 50.000h

RGBW


- White CCT at 4000K. (Other CCTs are available upon request).

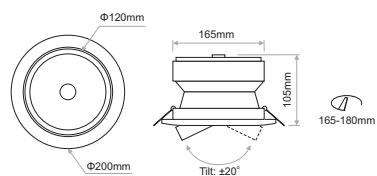

Model	LED Power	CCT*	CRI80, CRI90, CRI97 LED Source	Type	Beam Angle	Colour	Dimming Option	Accessories
TALUS ADJ RC (TALUS A RC)	23.9W (24)	2700K (27B)	3621lm 2987lm 2647lm	Adjustable (AD)	20° (20) 38° (38) 60° (60) 110°*** (110)	White (WH) Black (BL)	Without Driver (00)	COVER Clear (0;) Center Frost (1;) Diffused (2;) (XX) EXTRAS No Extras (0)
		3000K (30B)	3847lm 3123lm 2829lm				Non Dimmable (ND)	
		4000K (40B)	3960lm 3304lm -				Analogue (1-10V) (A1)	
		5700K (57B)	3847lm - -				DMX (DX) DALI (DL) Phase Cut (PC) Push Button (PB) Wireless***** (WL)	
	31.3W (31)	2700K (27B)	4510lm 3721lm 3298lm	Adjustable (AD)	20° (20) 38° (38) 60° (60) 110°*** (110)	White (WH) Black (BL)	Without Driver (00)	COVER Clear (0;) Center Frost (1;) Diffused (2;) (XX) EXTRAS No Extras (0)
		3000K (30B)	4792lm 3890lm 3524lm				Non Dimmable (ND)	
		4000K (40B)	4933lm 4115lm -				Analogue (1-10V) (A1)	
		5700K (57B)	4792lm - -				DMX (DX) DALI (DL) Phase Cut (PC) Push Button (PB) Wireless***** (WL)	
	37.1W (37)	2700K (27B)	5199lm 4289lm 3802lm	Adjustable (AD)	20° (20) 38° (38) 60° (60) 110°*** (110)	White (WH) Black (BL)	Without Driver (00)	COVER Clear (0;) Center Frost (1;) Diffused (2;) (XX) EXTRAS No Extras (0)
		3000K (30B)	5524lm 4484lm 4062lm				Non Dimmable (ND)	
		4000K (40B)	5687lm 4744lm -				Analogue (1-10V) (A1)	
		5700K (57B)	5524lm - -				DMX (DX) DALI (DL) Phase Cut (PC) Push Button (PB) Wireless***** (WL)	
Tunable White			90 (90)	Adjustable (AD)	15°** (15) 35°** (35) 55°** (55) 110°*** (110)	White (WH) Black (BL)	Without Driver (00)	COVER Clear (0;) Center Frost (1;) Diffused (2;) (XX) EXTRAS No Extras (0)
23.9W (24)	Tunable White (TWB) 2700K-5700K		2252lm (Both CCTs driven)				Without Driver (00)	
	34.8W (35)						3188lm (Both CCTs driven)	
Warm Dimmable			95 (95)				Adjustable (AD)	
30.7W (WD31)	Warm Dimmable (1830B) 1800K-3000K		2962lm	Without Driver (00)				
				DMX (DX) DALI (DL) Phase Cut (PC) Push Button (PB) Wireless***** (WL)				
				Analogue (1-10V) (A1)				
RGBW**** (RGBW)			2075lm	Adjustable (AD)	35° (35) 55° (55)	White (WH) Black (BL)	Without Driver (00)	COVER Diffused (2;) (20) EXTRAS No Extras (0)
29.5W (30)							Without Driver (00)	
42.5W (43)			2695lm	DMX (DX) DALI (DL) Wireless***** (WL)				

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** Beam angle values are only valid for clear cover.
 *** 110° only for diffused cover.
 **** Other colour combinations available upon request.
 ***** The wireless dimming option includes driver and Bluetooth dimming accessory.

Warm dimming 3000K to 1800K

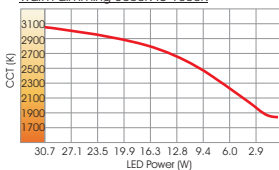

Ordering Code Example: TALUS A RC31-30B-80-AD-38-BL-00-00