



- TETRA HV linear interior luminaires are available either for surface or pendant installation.
- Selection of dimming options available: Non dimmable/ Analogue 1-10V/ DALI/ Wireless.
- It is offered with Transparent, Milky Satin, or Microprismatic cover.
- Pendant option is available either with direct only lighting or with direct and indirect lighting.
- Emergency Function capability available on request (3 hours, with build-in rechargeable battery).
- L80/B10 50.000h
- 3 SDCM
- Ingress Protection: IP40

Available upon request:



- ✓ Custom luminaire colours
- ✓ Emergency version

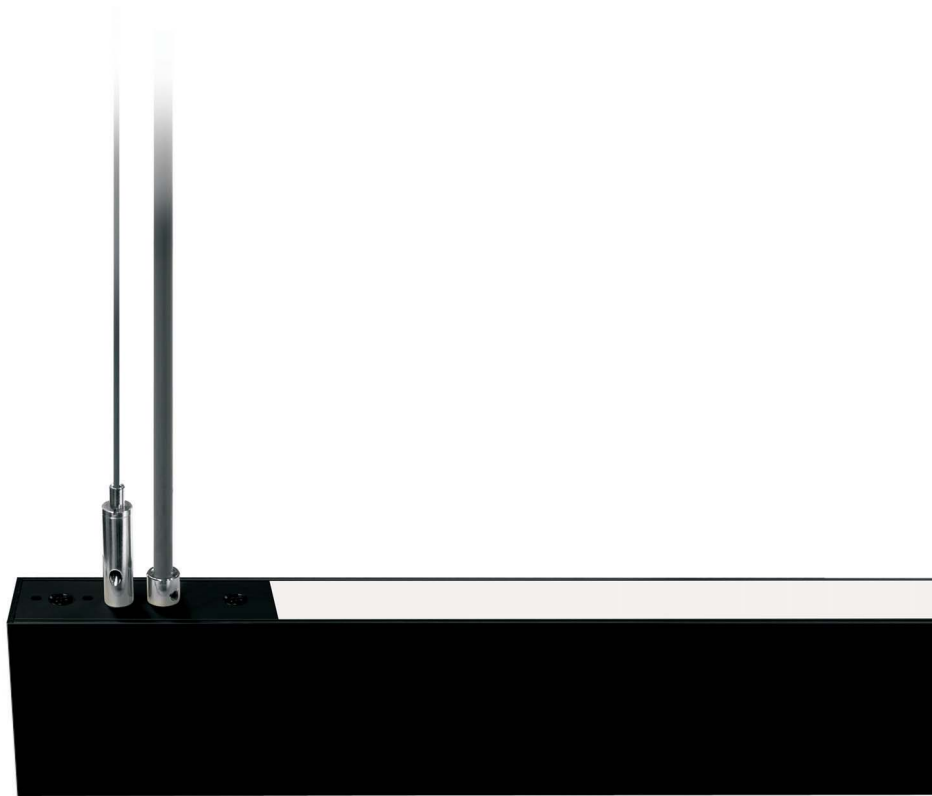


TETRA HV SF
(Surface)






TETRA HV PD
(Pendant)

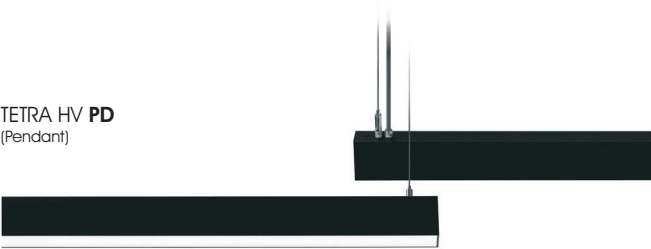

TETRA HV PDDI
(Pendant Direct/Indirect)

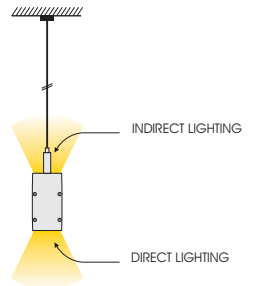

Model	Luminaire Colour	CCT	Watt / Length	2700K	3000K	4000K	Type	Voltage	Dimming Option	Extras
TETRA HV Surface <i>(TETRA HV SF)</i>	Anodized <i>(AN)</i>	2700K <i>(27)</i>	15.8W / 57cm <i>(16W057)</i>	2465lm	2575lm	2710lm	Transparent <i>(TR)</i>	230VAC <i>(230)</i>	Non Dimmable Analogue (1-10V)	Standard <i>(0)</i>
			23.8W / 85cm <i>(24W085)</i>	3700lm	3865lm	4070lm				
	White <i>(WH)</i>	3000K <i>(30)</i>	31.7W / 113cm <i>(32W113)</i>	4935lm	5155lm	5425lm	Milky Satin <i>(MS)</i>	DALI Wireless	Emergency function* <i>(1)</i>	
TETRA HV Pendant <i>(TETRA HV PD)</i>	Black <i>(BL)</i>	4000K <i>(40)</i>	39.6W / 141cm <i>(40W141)</i>	6170lm	6445lm	6780lm	Microprismatic <i>(MP)</i>			
			47.5W / 169cm <i>(48W169)</i>	7400lm	7730lm	8135lm				
			55.4W / 197cm <i>(55W197)</i>	8635lm	9020lm	9495lm				
			63.4W / 225cm <i>(63W225)</i>	9870lm	10310lm	10850lm				
			71.3W / 253cm <i>(71W253)</i>	11100lm	11600lm	12205lm				
			79.2W / 281cm <i>(79W281)</i>	12340lm	12890lm	13560lm				
TETRA HV PENDANT DIRECT/ INDIRECT <i>(TETRA HV PDD)</i>				LED Source DIRECT INDIRECT	LED Source DIRECT INDIRECT	LED Source DIRECT INDIRECT	DIRECT LIGHTING  INDIRECT LIGHTING 			EMERGENCY FUNCTION  CONTROLS 
			24.4W / 57cm <i>(24W057)</i>	2465lm 695lm	2575lm 730lm	2710lm 765lm				
			36.6W / 85cm <i>(37W085)</i>	3700lm 1390lm	3865lm 1455lm	4070lm 1530lm				
			48.8W / 113cm <i>(49W113)</i>	4935lm 2085lm	5155lm 2185lm	5425lm 2295lm				
			61W / 141cm <i>(61W141)</i>	6170lm 2780lm	6445lm 2910lm	6780lm 3060lm				
			73.1W / 169cm <i>(73W169)</i>	7400lm 3475lm	7730lm 3640lm	8135lm 3825lm				
			85.3W / 197cm <i>(85W197)</i>	8635lm 4170lm	9020lm 4365lm	9495lm 4590lm				
			92.6W / 225cm <i>(93W225)</i>	9870lm 4865lm	10310lm 5095lm	10850lm 5355lm				
			104.7W / 253cm <i>(105W253)</i>	11100lm 5560lm	11600lm 5820lm	12205lm 6120lm				
			116.8W / 281cm <i>(117W281)</i>	12340lm 6255lm	12890lm 6550lm	13560lm 6885lm				

* **Note for SF & PD:**

All 57cm and 85cm DALI, Analog (1-10), Wireless models are not available with emergency function.

** **Note for standard control:**

All 57cm and 85cm models are not available with emergency function.


** **Note for separated controls:**

All 57cm, 85cm and 113cm models, are not available with emergency function.

*** **Note:** With control option you can choose one control (standard) for Direct & Indirect lighting or two controls (Separated) for independent control of Direct and Indirect lightings.

Ordering Code Example:


TETRA HV PDDI-AN-30-61W141-MSTR-230-ND-01



Accessories for Surface (SF)



PRH.103 Line alignment

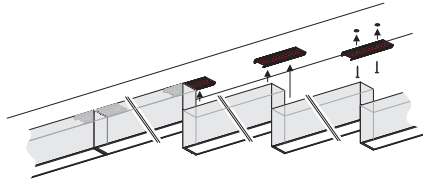


Accessories for Pendant (PD) & Pendant Direct/Indirect (PDDI)

Canopy Surface




- PRH.039 White
- PRH.082 Black
- PRH.085 Light Grey



Canopy Recessed




- PRH.040 White
- PRH.083 Black
- PRH.086 Light Grey




Canopy Trimless



- PRH.041 White
- PRH.084 Black
- PRH.087 Light Grey




PRH.104 Line alignment

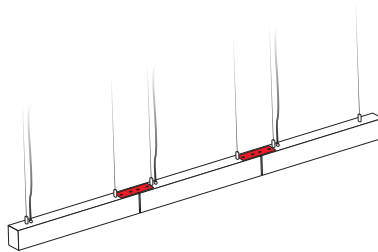


DIRECT LIGHTING


Transparent cover
LOR 0,79



Milky Satin cover
LOR 0,57




Micropismatic cover
LOR 0,60




INDIRECT LIGHTING

Transparent cover
LOR 0,89



Milky Satin cover
LOR 0,71



Micropismatic cover
LOR 0,71

