


- TETRA SLICK linear interior luminaire is available either for surface or pendant installation.
- It is offered with transparent or milky satin cover.
- 3 SDCM
- L90/B10 50.000h
- IP40


Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



**Available upon request:**

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

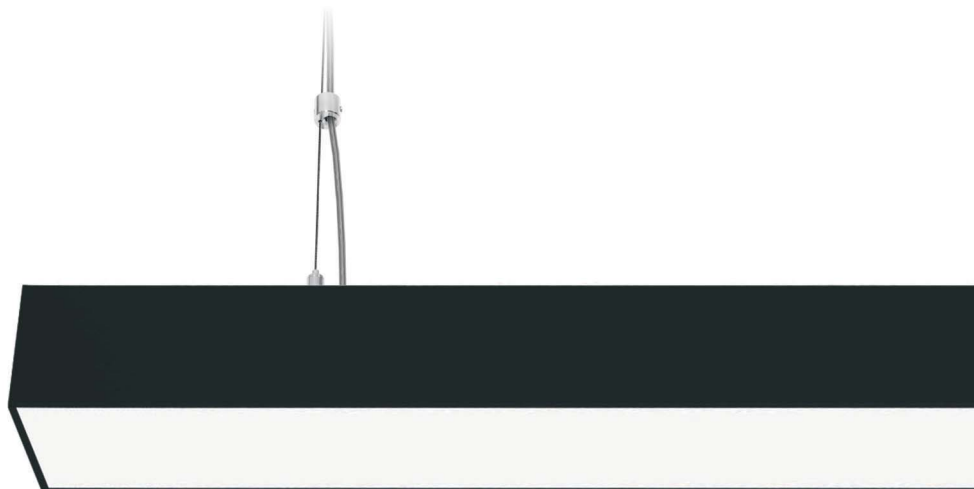

Model	Luminaire Colour	CCT	Watt / Length	CRI	Type	Voltage
<b>TETRA SLICK Surface</b> (TETRA SLS)	Anodized (AN)	2000K (20N)	12.2W / 60cm (12W060)	≥ 80 (80)	Transparent (TR) Milky Satin (MS) Microprismatic (MP)	24VDC (24)
	White (WH)	2500K (25N)	24.5W / 60cm (24W060)			
	Black (BL)	2700K (27N)	19.25W / 93cm (19W093)			
<b>TETRA SLICK Pendant</b> (TETRA SLP)		3000K (30N)	38.5W / 93cm (38W093)			
		4000K (40N)	21W / 102cm (21W102)			
		5700K (57N)	42W / 102cm (42W102)			
			24.5W / 119cm (24W119)			
			49W / 119cm (49W119)			
		31.5W / 152cm (31W152)				
		63W / 152cm (63W152)				
		42W / 202cm (42W202)				
		84W / 202cm (84W202)				

Ordering Code Example:  
 TETRA SLS-BL-30N-63W152-80-MS-24

