


# U TYPE

- U TYPE linear luminaire is available for surface or pendant application.
- It is available with milky, milky satin, ruled, or transparent cover.
- L90/B10 50000h
- 3 SDCM
- IP40


Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



***Available upon request:***

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

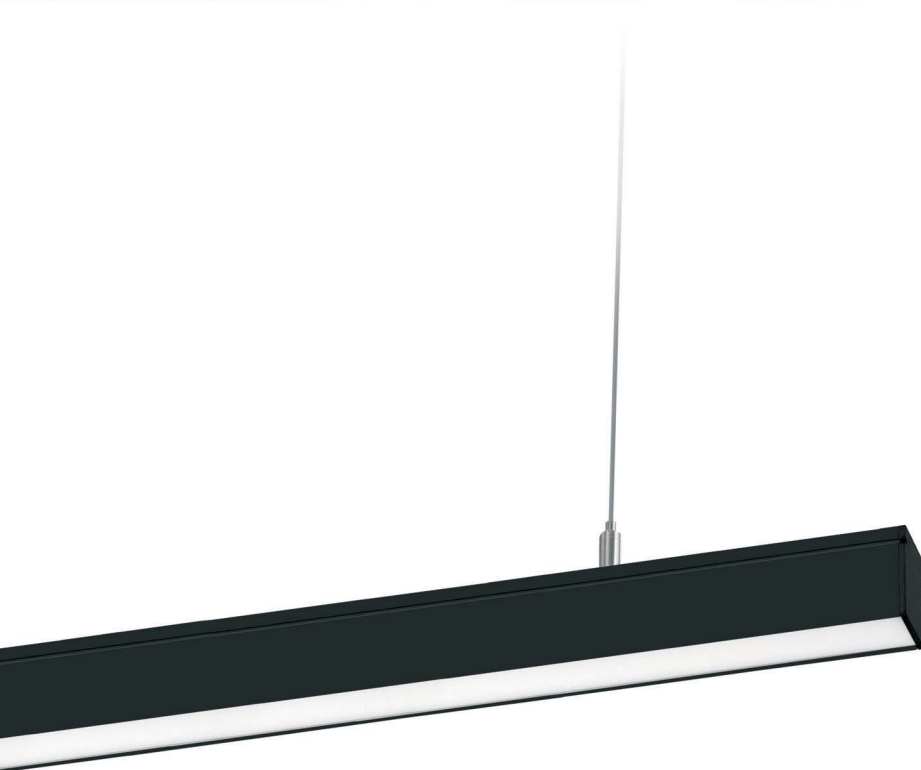

Anodized



White



Black



Model	Luminaire Colour	CCT	CRI	Type	Watt / Length	Voltage
<b>U TYPE Surface</b> <i>(U TYPE SF)</i>	Anodized <i>(AN)</i>	2000K <i>(20N)</i>	≥ 80 <i>(80)</i>	Milky <i>(ML)</i>	7W / 35cm <i>(07W035)</i>	24VDC <i>(24)</i>
	White <i>(WH)</i>	2500K <i>(25N)</i>		Milky Satin <i>(MS)</i>	12.2W / 60cm <i>(12W060)</i>	
	Black <i>(BL)</i>	2700K <i>(27N)</i>		Ruled <i>(RL)</i>	17.5W / 85cm <i>(17W085)</i>	
<b>U TYPE Pendant</b> <i>(U TYPE PD)</i>		3000K <i>(30N)</i>		Transparent <i>(TR)</i>	21W / 102cm <i>(21W102)</i>	
		4000K <i>(40N)</i>			24.5W / 119cm <i>(24W119)</i>	
		5700K <i>(57N)</i>			31.5W / 152cm <i>(31W152)</i>	
					42W / 202cm <i>(42W202)</i>	

Ordering Code Example:

U TYPE SF-BL-30N-80-ML-24W119-24

