




- Whisper is a high aesthetically downlight available recessed or trimless.
- It is available either round or square.
- WHISPER DEEP version is also available for LED lamps.
- Luminaire outer trim material: aluminium.
- Outer trim available in black or white as standard but custom colours also available upon request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<15 for DEEP version models).
- Selection of IP protection: either IP20 or IP54 (face only).

RC



ADJ



Name	Shape*	Model	CCT	CRI80, CRI90 LED Source	Beam Angle	Luminaire Colour: Trim/Inner Case	Dimming Option	Accessories
				80 (80) 90 (90)				
<b>WHISPER RC</b> <i>(WHISPER RC)</i>	Round <i>(RD)</i>	<b>Low Depth 7W</b> <i>(LD7)</i>	2700K (27C)	930lm 762lm	30° (30)	White/White (WW)	Without Driver (00)	
			3000K (30C)	960lm 792lm		White/Black (WB)	Non Dimmable (ND)	
<b>WHISPER ADJ</b> <i>(WHISPER A)</i>	Square <i>(SQ)</i>	4000K (40C)	1020lm 840lm	Black/Black (BB)	Analogue (1-10V) (A1)			
		5000K (50C)	1020lm 840lm	Black/White (BW)	DMX (DX)			
		<b>Standard 6.2W</b> <i>(ST6)</i>	2700K (27C)	704lm 568lm	18° (18)		DALI (DL)	
			3000K (30C)	713lm 608lm	37° (37)		Push Button (PB)	
			4000K (40C)	760lm 656lm	52° (52)		Phase Cut (PC)	
			5000K (50C)	736lm 704lm			Wireless** (WL)	
		<b>Standard 12.2W</b> <i>(ST12)</i>	2700K (27C)	1590lm 1380lm				
			3000K (30C)	1710lm 1485lm				
			4000K (40C)	1830lm 1590lm				
			5000K (50C)	1710lm 1590lm				
		<b>Standard 18W</b> <i>(ST18)</i>	2700K (27C)	2067lm 1794lm				
			3000K (30C)	2223lm 1931lm				
			4000K (40C)	2379lm 2067lm				
			5000K (50C)	2223lm 2067lm				
		<b>Narrow Beam 6W</b> <i>(NB6)</i>	2700K (27C)	616lm 497lm	9° (09)			
			3000K (30C)	616lm 532lm				
			4000K (40C)	665lm 574lm				
			5000K (50C)	714lm 616lm				
		<b>Narrow Beam 8W</b> <i>(NB8)</i>	2700K (27C)	792lm 639lm				
			3000K (30C)	792lm 684lm				
			4000K (40C)	855lm 738lm				
			5000K (50C)	918lm 792lm				
		<b>Zoom 6.4W</b> <i>(ZM6)</i>	2700K (27C)	704lm 568lm	22°~50° <i>(2250)</i>			
			3000K (30C)	713lm 608lm				
			4000K (40C)	760lm 656lm				
			5000K (50C)	736lm 704lm				
		<b>Zoom 13W</b> <i>(ZM13)</i>	2700K (27C)	1306lm 1098lm				
			3000K (30C)	1360lm 1150lm				
			4000K (40C)	1435lm 1236lm				
			5000K (50C)	1453lm 1236lm				
				90 (90) 95 (95)				
		<b>Warm Dimming 0.2~6W</b> <i>(WD6)</i>	1800K-3000K <i>(1830B)</i>	636lm 518lm	18° (18)		Analogue (1-10V) (A1)	
					37° (37)		DALI (DL)	
					52° (52)		Phase Cut (PC)	
		<b>Warm Dimming 12W</b> <i>(WD12)</i>	1800K-3000K <i>(1830B)</i>	1246lm 1045lm			Wireless** (WL)	
		<b>Tunable White 5.9W</b> <i>(TW6)</i>	2700K-5000K <i>(2750B)</i>	585lm (both CCTs driven)			DALI (DL)	
							Wireless** (WL)	
		<b>Tunable White 11.5W</b> <i>(TW12)</i>	2700K-5000K <i>(2750B)</i>	987lm (both CCTs driven)				

\* WHISPER ADJ only available in round shape

\*\* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: WHISPER RC-RD-ST18-30C-80-37-WW-DL-100



WHISPER DEEP LL



Model	Shape*	Luminaire Colour:	Lamp Holder	Accessories
<b>WHISPER RC DEEP LL</b> <i>(WHISPER RC DEEP LL)</i>	Round (RD) Square (SQ)	White/White (WW) White/Black (WB) Black/Black (BB) Black/White (BW)	GU10 (max 7.5W) (G1)	(XX)  COVER Standard (0X) Honeycomb (1X) Linear Spread (2X) Softening Lens (3X)  IP RATE IP20 (0X) IP54 (1X)
<b>WHISPER ADJ DEEP LL</b> <i>(WHISPER A DEEP LL)</i>				




\* WHISPER ADJ DEEP Retrofit only available in round shape

Ordering Code Example:  
WHISPER RC DEEP LL-RD-WW-G1-10






LD7

WHISPER RD BL






ST6/ ST12/ ST18/ WD6/ WD12/ TW6/ TW12

WHISPER RD BL




WHISPER SQ BL





NB6/ NB8

WHISPER RD BL





ZM6/ ZM13


WHISPER RD BL





**WHISPER RC**

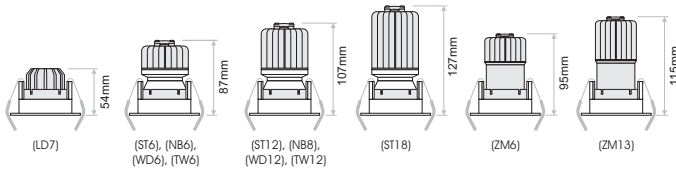

**WHISPER RC DEEP LL**



**WHISPER ADJ**

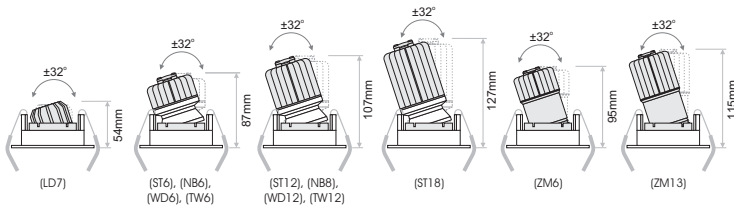

**WHISPER ADJ DEEP LL**

