


VERONA R

Ceiling Recessed 

- 2-3 SDCM
- L90/B10 50.000h

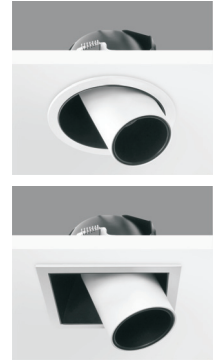

LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VERONA RECESSED ROUND 10.3W <i>(VERONA R RD10)</i>	<i>(27B1365)</i> 2700K - 1365lm <i>(30B1435)</i> 3000K - 1435lm	<i>(40B1479)</i> 4000K - 1479lm <i>(57B1550)</i> 5700K - 1550lm	Adjustable	[80] 80	[24] 24° [32] 32°	[WH] White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1-10V) [DX] DMX [DL] DALI [PB] Push Button [PC] Phase Cut [WL] Wireless **	COVER [0.] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency
VERONA RECESSED SQUARE 10.3W <i>(VERONA R SQ10)</i>	<i>(27B1138)</i> 2700K - 1138lm <i>(30B1180)</i> 3000K - 1180lm <i>(40B1265)</i> 4000K - 1265lm							
VERONA RECESSED ROUND 10.6W <i>(VERONA R RD11)</i>	<i>(27B0973)</i> 2700K - 973lm <i>(30B1038)</i> 3000K - 1038lm							
VERONA RECESSED SQUARE 10.6W <i>(VERONA R SQ11)</i>				[97] 97				

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
VERONA R RD10 - 40B1265 - AD - 90 - 24 - WH - DX - 00

