RONELO

- RONELO adjustable downlight with consumption of up to 62 watt.
- High efficiency deep reflector with clear cover glass.
- Ideal easy replacement in existing theater houselighting.
- Dimmable options.
- Increased efficiency.

Monochromatic, TW:
- 3 SDCM
- L90/B10 50.000h

RGBW:
- White CCT at 4000K. (Other CCTs are available upon request).
- L80/B10 50.000h

LIGHTSOURCE BY bridgelux — Monochromatic, TW

CREE LEDs — RGBW

Model	LED Power	CCT*	CRI80, CRI90** LED Source		Type	Beam Angle	Colour	Dimming Option	Accessories
			80 (80)	90 (90)					Cover
RONELO (RONELO)	**45.2W** (45)	2700K (27B)	7001lm	5776lm	Adjustable (AD)	18° (18)	White (WH)	Without Driver (00)	Standard (0X)
		3000K (30B)	7438lm	6038lm		38° (38)	Black (BL)	Non Dimmable (ND)	Diffuser (1X)
		4000K (40B)	7657lm	6388lm		66° (66)		Analogue (1-10V) (A1)	Frosted Center (2X)
		5700K (57B)	7438m	-		110° (110)		DMX*** (DX)	
								DALI (DL)	(XX)
	53.3W (53)	2700K (27B)	8068lm	6656lm				Push Button (PB)	EXTRAS
		3000K (30B)	8572lm	6958lm				Wireless**** (WL)	No Extras (X0)
		4000K (40B)	8824lm	7362lm				Phase Cut*** (PC)	
		5700K (57B)	8572lm	-					
	61.5W (62)	2700K (27B)	9112lm	7518lm					
		3000K (30B)	9682lm	7859lm					
		4000K (40B)	9967lm	8315lm					
		5700K (57B)	9682lm	-					
	Tunable White			90 (90)					
	39W (40)	Tunable White 2700K~5000K (TWB)		3135lm (Both CCTs driven)				Without Driver (00)	
								DMX (DX)	
								DALI (DL)	
								Wireless**** (WL)	
	R G B W								Cover
	29.5W (30)	RGBW (RGBW)	2075lm		Adjustable (AD)	20° (20)	White (WH)	Without Driver (00)	Standard (0X)
						45° (45)	Black (BL)	DMX (DX)	
	42.5W (43)		2695lm			65° (65)		DALI (DL)	(XX)
								Wireless**** (WL)	EXTRAS
									No Extras (X0)

* BRIDGELUX: Models with CCTs of 3500K, 5000K & 6500K are available upon request.
* CREE RGBW: Other colour combinations available upon request.
**CRI90 Available up to 5000K. CRI97 Available upon request.
***Consists of two components (power supply + led driver).
**** The wireless dimming option includes driver and Bluetooth dimming accessory.
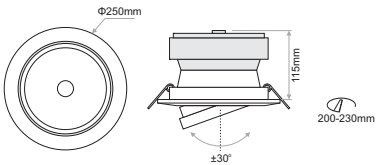
Ordering Code Example: RONELO 53-40B-80-AD-66-WH-ND-00