



- SANTI and SANTI MINI is a series of elegant recessed downlights with extra small trim.
- It is available either round or square.
- SANTI is also available in wash version.
- Power consumption: varies from 3 to 18 watt.
- Beam angle: varies from 9 to 50 degrees.
- SANTI DEEP version is also available for LED lamps.
- Accessories available: honeycomb, linear spread lens, softening lens.
- Available in Black RAL9004 or White RAL9003 as standard but custom colours also available upon request.
- Luminaire outer trim material: aluminium.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<15 for DEEP version models).
- Selection of IP protection: either IP20 or IP54 (face only).

## SANTI



## SANTI MINI




SANTI



LD7, ST6, ST12, ST18, NB6, NB8, ZM6, ZM13

WD6, WD12, TW6, TW12

Name	Shape*	Model	CCT	CRI80, CRI90 LED Source		Beam Angle	Luminaire Colour	Dimming Option	Accessories	
				80 (80)	90 (90)					
<b>SANTI</b> (SANTI)	Round (RD)	<b>Low Depth 7W</b> (LD7)	2700K (27C)	930lm	762lm	30° (30)	White (WH) Black (BL)	Without Driver (00)		
			3000K (30C)	960lm	792lm			Non Dimmable (ND)		
<b>SANTI ADJ</b> (SANTI A)	Square (SQ)		4000K (40C)	1020lm	840lm			Analogue (1-10V) (A1)		
			5000K (50C)	1020lm	840lm			DMX (DX)		
								DALI (DL)		
<b>SANTI WASH</b> (SANTI W)		<b>Standard 6.2W</b> (ST6)	2700K (27C)	704lm	568lm	19° (19)				Push Button (PB)
			3000K (30C)	713lm	608lm	35° (35)				Phase Cut (PC)
			4000K (40C)	760lm	656lm	50° (50)				Wireless*** (WL)
			5000K (50C)	736lm	704lm	<b>WASH**</b>				
						17° (17)				
						23° (23)				
					32° (32)					
				<b>Standard 12.2W</b> (ST12)	2700K (27C)	1590lm	1380lm			IP RATE
			3000K (30C)		1710lm	1485lm	IP20 (x10)			
			4000K (40C)		1830lm	1590lm	IP54 (x11)			
				<b>Standard 18W</b> (ST18)	2700K (27C)	2067lm	1794lm			EXTRAS
			3000K (30C)		2223lm	1931lm	No Extras (x00)			
	4000K (40C)	2379lm	2067lm		Emergency Kit (x01)					
			5000K (50C)	2223lm	2067lm					
		<b>Narrow Beam 6W</b> (NB6)	2700K (27C)	616lm	497lm	9° (09)				
	3000K (30C)		616lm	532lm						
	4000K (40C)		665lm	574lm						
		<b>Narrow Beam 8W</b> (NB8)	2700K (27C)	792lm	639lm					
	3000K (30C)		792lm	684lm						
	4000K (40C)		855lm	738lm						
			5000K (50C)	918lm	792lm					
		<b>Zoom 6.4W</b> (ZM6)	2700K (27C)	704lm	568lm	22°-50° (2250)				
	3000K (30C)		713lm	608lm						
	4000K (40C)		760lm	656lm						
			5000K (50C)	736lm	704lm					
		<b>Zoom 13W</b> (ZM13)	2700K (27C)	1306lm	1098lm					
	3000K (30C)		1360lm	1150lm						
	4000K (40C)		1435lm	1236lm						
			5000K (50C)	1453lm	1236lm					
				90 (90)	95 (95)					
		<b>Warm Dimming 0.2~6W</b> (WD6)	1800K-3000K (1830B)	636lm	518lm	19° (19)			Analogue (1-10V) (A1)	
						35° (35)				DALI (DL)
						50° (50)				Phase Cut (PC)
						<b>WASH**</b>		Wireless*** (WL)		
		<b>Warm Dimming 12W</b> (WD12)	1800K-3000K (1830B)	1246lm	1045lm	17° (17)				
						23° (23)				
						32° (32)				
		<b>Tunable White 5.9W</b> (TW6)	2700K-5000K (2750B)	585lm (both CCT's driven)					DALI (DL)	
									Wireless*** (WL)	
		<b>Tunable White 11.5W</b> (TW12)	2700K-5000K (2750B)	987lm (both CCT's driven)						

\* SANTI only available in round shape.

\*\* Beam angle only for WASH version.

\*\*\* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: SANTI W-RD-ST18-30C-80-32-WH-DL-100



ACR.056  
Honeycomb  
(as extra)



ACR.057  
Linear Spread  
(as extra)



ACR.059  
Softening Lens  
(as extra)

**SANTI MINI**


Name	Shape	Model	CCT	CRI80, CRI90 LED Source		Beam Angle	Luminaire Colour	Dimming Option	Accessories
				80 (80)	90 (90)				
<b>SANTI MINI</b> <i>(SANTI MINI)</i>	Round <i>(RD)</i>	<b>Standard 3W</b> <i>(ST3)</i>	2700K (27C)	396lm	320lm	27° (27)	White (WH)	Without Driver (00)	<p><b>COVER</b></p> <ul style="list-style-type: none"> <li>Standard (0X)</li> <li>Honeycomb (1X)</li> <li>Linear Spread (2X)</li> <li>Softening Lens (3X)</li> </ul> <p><b>IP RATE</b></p> <ul style="list-style-type: none"> <li>IP20 (X0)</li> <li>IP54 (X1)</li> </ul> <p><b>EXTRAS</b></p> <ul style="list-style-type: none"> <li>No Extras (X0)</li> <li>Emergency Kit** (X1)</li> </ul>
			3000K (30C)	396lm	342lm	35° (35)	Black (BL)	Non Dimmable (ND)	
<b>SANTI MINI ADJ</b> <i>(SANTI MINI A)</i>	Square <i>(SQ)</i>	<b>Standard 4.3W</b> <i>(ST4)</i>	4000K (40C)	428lm	369lm	47° (47)		Analogue (1-10V) (A1)	
			5000K (50C)	428lm	396lm			DIMX (DX)	
		<b>Narrow Beam 4W</b> <i>(NB4)</i>	2700K (27C)	528lm	426lm	13° (13)		Push Button (PB)	
			3000K (30C)	528lm	456lm			Phase Cut (PC)	
		4000K (40C)	570lm	492lm			Wireless* (WL)		
		5000K (50C)	570lm	528lm					


**ACR.067**  
Honeycomb  
*(as extra)*

**ACR.066**  
Linear Spread  
*(as extra)*

**ACR.065**  
Softening Lens  
*(as extra)*

\* The wireless dimming option includes driver and Bluetooth dimming accessory.  
 \*\* Emergency option and battery replacement accessibility of the emergency kit should be considered as the kit does not pass through the luminaire cutout.  
 Emergency option can be applied to 2-5 luminaires depending on the driver.

Ordering Code Example: SANTI MINI-RD-ST4-30C-80-35-WH-DL-100

**SANTI DEEP LL**


Model	Outer Trim	Luminaire Colour:	Lamp Holder	Accessories
<b>SANTI DEEP LL</b> <i>(SANTI DEEP LL)</i>	Round (RD)	White/White (WW)	GU10 (max 7.5W) (G1)	<p><b>COVER</b></p> <ul style="list-style-type: none"> <li>Standard (0X)</li> <li>Honeycomb (1X)</li> <li>Linear Spread (2X)</li> <li>Softening Lens (3X)</li> </ul> <p><b>IP RATE</b></p> <ul style="list-style-type: none"> <li>IP20 (X0)</li> <li>IP54 (X1)</li> </ul>
	Square (SQ)	White/Black (WB)		
<b>SANTI ADJ DEEP LL</b> <i>(SANTI A DEEP LL)</i>		Black/Black (BB)		
		Black/White (BW)		
<b>SANTI WASH DEEP LL</b> <i>(SANTI W DEEP LL)</i>				


 Lamp  
Not included

**ACR.056**  
Honeycomb  
*(as extra)*



**ACR.057**  
Linear Spread  
*(as extra)*

**ACR.059**  
Softening Lens  
*(as extra)*


Ordering Code Example:  
SANTI A DEEP LL-RD-WW-G1-10

SANTI



SANTI

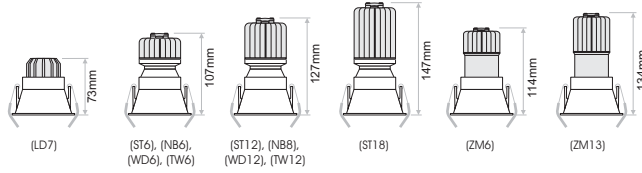


SANTI DEEP LL





SANTI ADJ

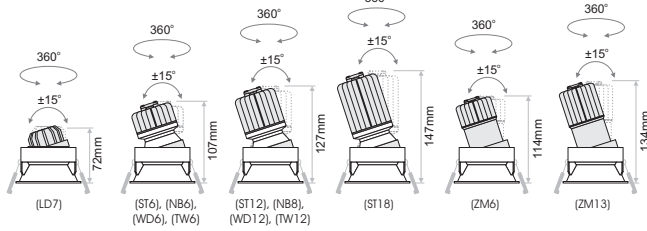


SANTI ADJ DEEP LL







SANTI WASH

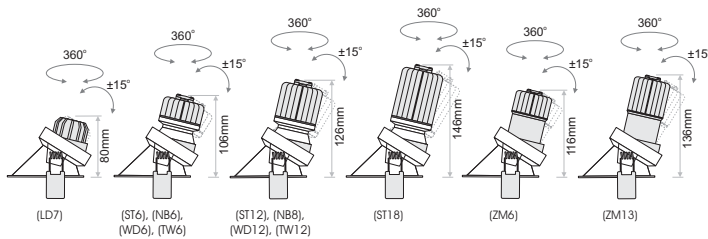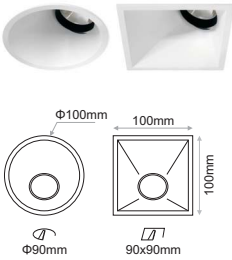

SANTI WASH DEEP LL






SANTI MINI







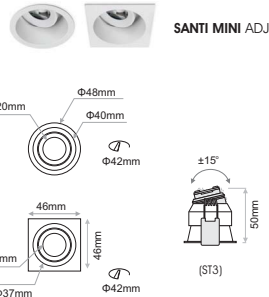

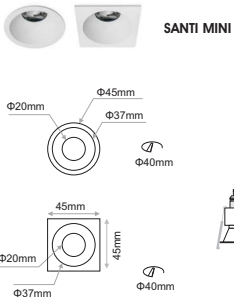


**SANTI**



**LD7**







**ST6/ ST12/ ST18/ WD6 /WD12 /TW6 /TW12**



**NB6/ NB8**






**ZM6/ ZM13**



**SANTI MINI**

**ST3 / ST4**



**NB4**

