



- Click it is an elegant system ideal for highly demanding aesthetically spaces.
- The system is available in surface, pendant and trimless version.
- Flexibility and easiness in the repositioning of the luminaires with a click.
- It is offered with a vast variety of accessories for limitless design in the final layout.
- Click it Spots include: three sized spots, zoom spot, frame and gobo spots.
- Click it Linear luminaires include: linear spots, linear wash, and four sized linear ambient luminaires.
- Click it Tubes include: two sized tubes rotatable 340degrees ensuring an interesting pattern.
- Click it Decorative luminaires include: two pendant cylindrical fixtures, a sphere spot and a pendant sphere.
- The system is offered in 42 PWM Dimmable or Wireless Dimmable or 48 DALI Dimmable.
- Track max amperage 10A.


Click It **Surface** Track

Code	Model	Length	Colour
CLK.013	Click It Surface Track	2m	Black
CLK.014	Click It Surface Track	3m	Black
CLK.016	Click It Surface Track	2m	White
CLK.017	Click It Surface Track	3m	White



Click It **Trimless** Track

Code	Model	Length	Colour
CLK.001	Click It Trimless Track	2m	Black
CLK.002	Click It Trimless Track	3m	Black
CLK.004	Click It Trimless Track	2m	White
CLK.005	Click It Trimless Track	3m	White




Hotel Juliani, St. Julian's, Malta

SURFACE POWER CONNECTORS for CLICK IT System


SURFACE

Code*	Description	Colour
CLK.058	2x180 Connector Surface	Black
CLK.059	2x180 Connector Surface	White
CLK.045	2x90 Connector Surface	Black
CLK.054	2x90 Connector Surface	White
CLK.060	3x90 Connector Surface	Black
CLK.061	3x90 Connector Surface	White
CLK.062	4x90 Connector Surface	Black
CLK.063	4x90 Connector Surface	White
CLK.064	2x120 Connector Surface	Black
CLK.065	2x120 Connector Surface	White
CLK.068	3x60 Connector Surface	Black
CLK.069	3x60 Connector Surface	White
CLK.066**	6x60 Connector Surface	Black
CLK.067**	6x60 Connector Surface	White

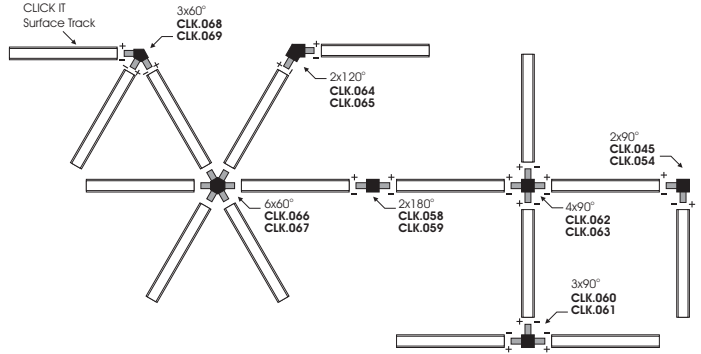

* Surface connector's electrical polarity is as shown. Possibility to change the electrical polarity to meet the geometry requirements of any space.
** CLK.066 / CLK.067 is surface track connector without power connectivity.


2x180°
CLK.058 / CLK.059




2x90°
CLK.045 / CLK.054



3x90°
CLK.060 / CLK.061



4x90°
CLK.062 / CLK.063




2x120°
CLK.064 / CLK.065



3x60°
CLK.068 / CLK.069




6x60°
CLK.066 / CLK.067



SURFACE PREFABRICATED CORNERS 90° for CLICK IT System

SURFACE


Code	Description	Colour
CLK.018	L CORNER Surface Ceiling to Ceiling	Black
CLK.021	L CORNER Surface Ceiling to Ceiling	White
CLK.019	L CORNER Surface Ceiling to Wall IN	Black
CLK.022	L CORNER Surface Ceiling to Wall IN	White
CLK.020	L CORNER Surface Ceiling to Wall OUT	Black
CLK.023	L CORNER Surface Ceiling to Wall OUT	White
CLK.118	CURVED 90° CORNER for Surface Track	Black
CLK.119	CURVED 90° CORNER for Surface Track	White

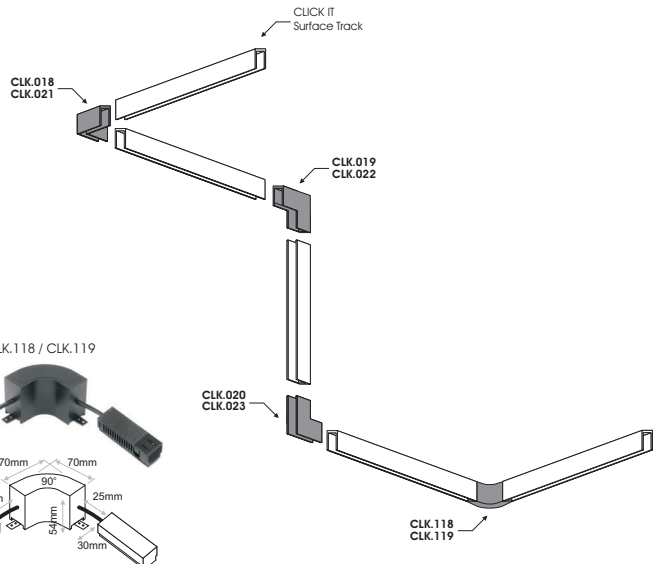


CLK.018 / CLK.021




CLK.019 / CLK.022



CLK.020 / CLK.023




CLK.118 / CLK.119




TRIMLESS

Code	Description	Colour
CLK.006	L CORNER Trimless Ceiling to Ceiling	Black
CLK.009	L CORNER Trimless Ceiling to Ceiling	White
CLK.007	L CORNER Trimless Ceiling to Wall IN	Black
CLK.010	L CORNER Trimless Ceiling to Wall IN	White
CLK.008	L CORNER Trimless Ceiling to Wall OUT	Black
CLK.011	L CORNER Trimless Ceiling to Wall OUT	White
CLK.096	T Connector Trimless	Black
CLK.097	T Connector Trimless	White
CLK.098	+ Connector Trimless	Black
CLK.099	+ Connector Trimless	White


CLK.006 / CLK.009




CLK.007 / CLK.010





CLK.008 / CLK.011














CLK.096 / CLK.097

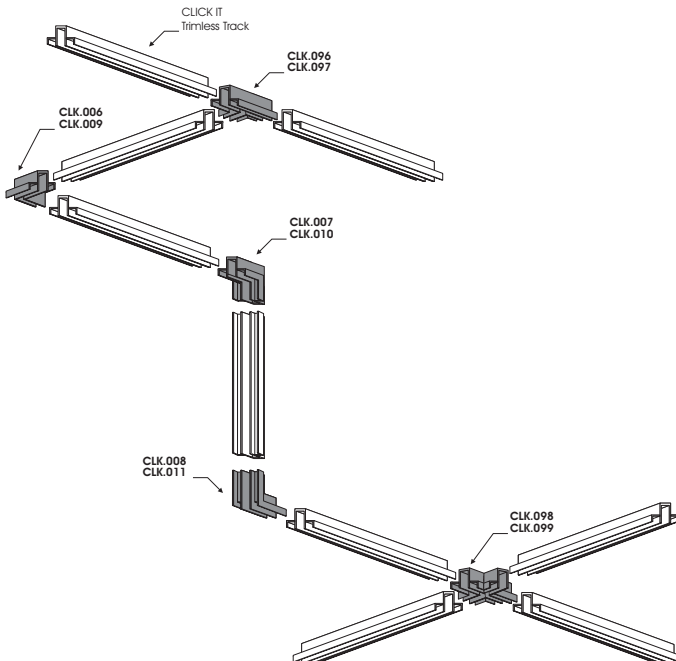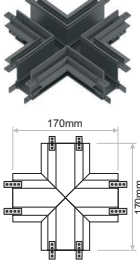


CLK.098 / CLK.099



Code	Description	Colour		
CLK.024 CLK.025	Live End with 1,5m cable Live End with 1,5m cable	Black White		
CLK.033 CLK.034	Live End with 0,6m cable Live End with 0,6m cable	Black White		
CLK.035 CLK.036	Live end no cable / straight connector Live end no cable / straight connector	Black White		
CLK.038 CLK.039	Adjustable Live Connector for track Adjustable Live Connector for track	Black White		
CLK.208 CLK.211	Driver Box 150W 42V ND Driver Box 150W 42V ND	Black White		
CLK.202 CLK.205	Driver Box 150W 42V WIRELESS (CASSAMBI) Driver Box 150W 42V WIRELESS (CASSAMBI)	Black White		
CLK.029 CLK.030	Black Cover 2m Black Cover 3m	Black Black		
CLK.103 CLK.104	White Cover 2m White Cover 3m	White White		
CLK.121	PMMA Transparent Cover for Indirect Lighting 2m	Transparent		

Code	Description	Colour		
CLK.031 CLK.032	End Cap Trimless & Surface End Cap Trimless & Surface	Black White		
CLK.037 CLK.105	Extension Line Connector Extension Line Connector	Black White		
CLK.935 CLK.936	Luminaire Stop for Vertical Installation Luminaire Stop for Vertical Installation	Black White		
PRH.082 PRH.039	Canopy Surface BLACK Canopy Surface WHITE	Black White		
PRH.083 PRH.040	Canopy Recessed BLACK Canopy Recessed WHITE	Black White		
PRH.084 PRH.041	Canopy Trimless BLACK Canopy Trimless WHITE	Black White		
ACC.291 ACC.292	Ceiling Suspension Installation 1,5m Ceiling Suspension Installation 3m			




CLICK IT SPOT 22W

- Click It S22 spot is the highest sized spot of Click It system.
- It is rotatable 320 degrees.
- Available in black or white colour.
- It is offered with a variety of accessories : honeycomb, line spread lens, softening lens, snoot, or half snoot
- UGR < 19(42°) / UGR < 15(35°) / UGR < 17(22°)
- L90/B10 50.000h
- 3SDCM




Model (LED Power)	CCT	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories	
CLICK IT SPOT 22.3W <i>(CLICK IT S22)</i>	<i>CR180</i>		Adjustable <i>(AD)</i>	80 <i>(80)</i>	22° <i>(22)</i>	White <i>(WH)</i>	42V PWM Dimmable <i>(DM)</i>	Standard <i>(0/)</i> Honeycomb <i>(1/)</i> Line spread lens <i>(2/)</i> Softening lens <i>(3/)</i> ↓ (X/X) ↑ EXTRAS No Extras <i>(/0)</i> Snoot Black <i>(/1)</i> Half Snoot Black <i>(/2)</i> Frosted Cover <i>(/3)</i> Snoot White <i>(/4)</i> Half Snoot White <i>(/5)</i>	
	3000K <i>(30C)</i>	2465lm			35° <i>(35)</i>	Black <i>(BL)</i>	48V DALI Dimmable <i>(DL)</i>		
	4000K <i>(40C)</i>	2837lm			42° <i>(42)</i>				
	5000K <i>(50C)</i>	2651lm							
	<i>CR190</i>		90 <i>(90)</i>	2700K <i>(27C)</i>	1850lm				
	3000K <i>(30C)</i>	1901lm							
4000K <i>(40C)</i>	2125lm								
5000K <i>(50C)</i>	1985lm								


Ordering Code Example: *CLICK IT S22-30C-AD-80-35-WH-DL-00*

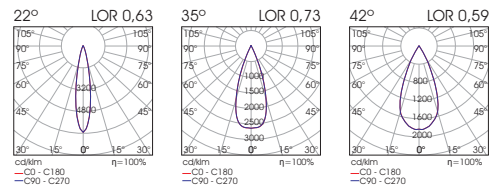

CLICK IT SPOT 22W
42V PWM Dimmable



CLICK IT SPOT 22W
48V DALI Dimmable



Honeycomb
(for $\Phi 52$)



Line spread lens
(for $\Phi 52$)



Softening lens
(for $\Phi 52$)



Snoot
(for $\Phi 52$)



Half Snoot
(for $\Phi 52$)




Frosted Cover
(for $\Phi 52$)

- Click It S18 spot is the middle sized spot of Click It system.
- It is rotatable 320 degrees.
- Available in black or white colour.
- It is offered with a variety of accessories : honeycomb, line spread lens, softening lens, snoot, or half snoot.
- UGR<20(44°) / UGR<13(35°) / UGR<15(21°)
- L90/B10 50.000h
- 3SDCM





Model (LED Power)	CCT	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
CLICK IT SPOT 17.6W <i>(CLICK IT S18)</i>	<i>CR180</i>		Adjustable <i>(AD)</i>	80 <i>(80)</i>	21° <i>(21)</i> 35° <i>(35)</i> 44° <i>(44)</i>	White <i>(WH)</i> Black <i>(BL)</i>	42V PWM Dimmable <i>(DM)</i> 48V DALI Dimmable <i>(DL)</i>	Standard <i>(0/)</i>
	2700K <i>(27C)</i>	1518lm						Honeycomb <i>(1/)</i>
	3000K <i>(30C)</i>	1634lm						Line spread lens <i>(2/)</i>
	4000K <i>(40C)</i>	1634lm						Softening lens <i>(3/)</i>
	5000K <i>(50C)</i>	1750lm						EXTRAS
	<i>CR90</i>							90 <i>(90)</i>
	2700K <i>(27C)</i>	1140lm	Snoot Black <i>(/1)</i>					
	3000K <i>(30C)</i>	1225lm	Half Snoot Black <i>(/2)</i>					
	4000K <i>(40C)</i>	1225lm	Frosted Cover <i>(/3)</i>					
	5000K <i>(50C)</i>	1310lm	Snoot White <i>(/4)</i>					
			Half Snoot White <i>(/5)</i>					

Ordering Code Example: *CLICK IT S18-30C-AD-80-35-WH-DL-00*

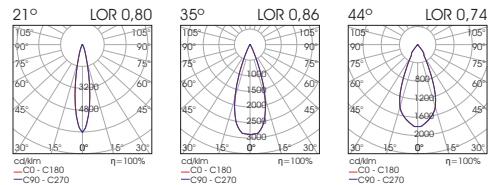

CLICK IT SPOT 18W
42V PWM Dimmable

CLICK IT SPOT 18W
48V DALI Dimmable



Honeycomb
(for Φ52)

Line spread lens
(for Φ52)

Softening lens
(for Φ52)



Snoot
(for Φ52)



Half Snoot
(for Φ52)



Frosted Cover
(for Φ52)






CLICK IT SPOT 7W

- Click It S7 spot is the smallest in size spot of Click It system.
- It is a miniaturized spot with a diameter of 30mm.
- It is a rotatable 320 degrees.
- Available in black or white colour.
- UGR < 21 (46°) / UGR < 14 (32°) / UGR < 17 (27°)
- L90/B10 50.000h
- 3SDCM



Model (LED Power)	CCT	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option
CLICK IT SPOT 7W <i>(CLICK IT S7)</i>		<i>CR180</i> <i>CR190</i>					
	2700K (27C)	636lm 545lm	Adjustable (AD)	80 (80)	27° (27)	White (WH)	42V PWM Dimmable (DM)
	3000K (30C)	682lm 585lm		90 (90)	32° (32)	Black (BL)	48V DALI Dimmable (DL)
	4000K (40C)	736lm 630lm			46° (46)		
	5000K (50C)	736lm 630lm					

Ordering Code Example: *CLICK IT S7-30C-AD-80-32-WH-DL*







- Click It Zoom spot of Click It system is a flexible spot that allows selection of the beam angle from 16 to 50 degrees.
- It is rotatable 320 degrees.
- Available in black or white colour.
- UGR<19(50°) / UGR<12(16°)
- L90/B10 50.000h
- 3SDCM



LIGHTSOURCE BY
bridgelux

Model (LED Power)	CCT	LED Source		Beam Angle	Type	Colour	Dimming Option
CLICK IT ZOOM SPOT 12W <i>(CLICK IT ZS12)</i>	2700K (27C)	1194lm	992lm	Adjustable (1650) 16°(min)-50°(max)	Adjustable (AD)	White (WH) Black (BL)	42V PWM Dimmable (DM) 48V DALI Dimmable (DL)
	3000K (30C)	1257lm	1055lm				
	4000K (40C)	1307lm	1106lm				

Ordering Code Example: *CLICK IT ZS12-30C-80-1650-AD-WH-DL*

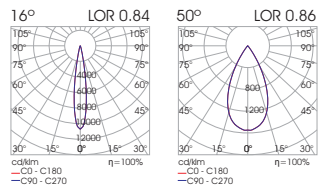





al2 Showroom, Athens, Greece
Architect: Nikos Glos

CLICK IT FRAME SPOT 13W

- Click It Zoom Frame is ideal to highlight artwork that requires a lighting frame.
- It is rotatable 320 degrees.
- Available in black or white colour.
- L90/B10 50.000h
- 3SDCM





Frame Spot



Model (LED Power)	CCT	LED Source		Type	CRI	Beam Angle	Colour	Dimming Option
		<i>CR180</i>	<i>CR190</i>					
CLICK IT FRAME SPOT 12.8W <i>(CLICK IT FR S13)</i>	2700K <i>(27C)</i>	1102lm	925lm	Adjustable <i>(AD)</i>	80 <i>(80)</i>	27° max <i>(27)</i>	White <i>(WH)</i> Black <i>(BL)</i>	42V PWM Dimmable <i>(DM)</i> 48V DALI Dimmable <i>(DL)</i>
	3000K <i>(30C)</i>	1148lm	965lm		90 <i>(90)</i>			
	4000K <i>(40C)</i>	1211lm	1015lm					
	5000K <i>(50C)</i>	1226lm	1030lm					

Ordering Code Example: *CLICK IT FR S13-30C-AD-80-27-WH-DL*





- Click It Zoom Gobo is suitable for applications where a logo, a photo or any other custom projection is required.
- Gobo material: glass
- It is rotatable 320 degrees.
- Available in black or white colour.
- L90/B10 50.000h
- 3SDCM





Gobo Spot



Model (LED Power)	CCT	LED Source		Type	CRI	Beam Angle	Colour	Dimming Option
		<i>CR180</i>	<i>CR190</i>					
CLICK IT GOBO SPOT 12.8W <i>(CLICK IT GB S13)</i>	2700K <i>(27C)</i>	1102lm	925lm	Adjustable <i>(AD)</i>	80 <i>(80)</i>	27° max <i>(27)</i>	White <i>(WH)</i>	42V PWM Dimmable <i>(DM)</i> 48V DALI Dimmable <i>(DL)</i>
	3000K <i>(30C)</i>	1148lm	965lm		90 <i>(90)</i>		Black <i>(BL)</i>	
	4000K <i>(40C)</i>	1211lm	1015lm					
	5000K <i>(50C)</i>	1226lm	1030lm					

Ordering Code Example: *CLICK IT GB S13-30C-AD-80-WH-DL*

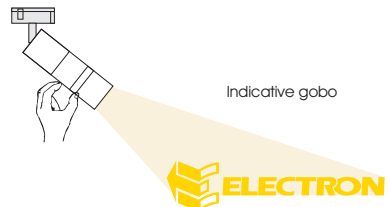



CLICK IT LINEAR SPOT 15W

- Click It LS15 is a directional linear luminaire of Click It System.
- Available in black or white colour.
- With a selection of beam angles to meet any lighting requirements.
- Length of 205mm.
- UGR < 19(56°) / UGR < 14(32°) / UGR < 10(25°) / UGR < 10(13°) / UGR < 10(9°) / UGR < 11(9-32°)
- L90/B10 50.000h
- 3SDCM



Model (LED Power)	CCT	CR180 LED Source	CR190 LED Source	Beam Angle	Colour	Dimming Option
CLICK IT LINEAR SPOT 14.9W <i>(CLICK IT LS15)</i>	2700K (27C)	1332lm	1098lm	9° (VN)	White (WH)	42V PWM Dimmable (DM)
	3000K (30C)	1404lm	1170lm	13° (NR)	Black (BL)	48V DALI Dimmable (DL)
	4000K (40C)	1476lm	1332lm	25° (MD)		
	5000K (50C)	1476lm	1332lm	32° (WD)		
				56° (VW)		
				9°-32° (AS)		
				Asymmetric		

Ordering Code Example: *CLICK IT LS15-30C-80-MD-BL-DL*


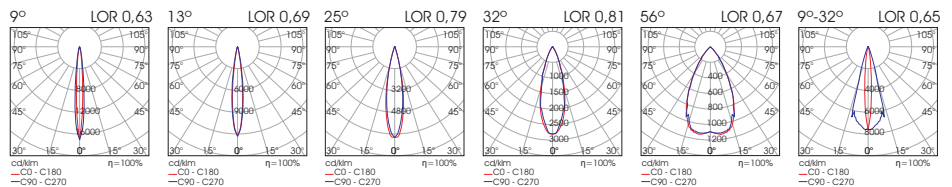


- Click It LW14 is a linear wash luminaire of Click It System.
- Available in black or white colour.
- With a beam angle of 10x48 degrees.
- Length of 205mm.
- L90/B10 50.000h
- 3SDCM



Model (LED Power)	CCT	CRI80 LED Source	CRI90 LED Source	Beam Angle	Colour	Dimming Option
CLICK IT LINEAR WASH 14W <i>(CLICK IT LW14)</i>	2700K (27C)	1250lm	1026lm	10°x48° (1048)	White (WH)	42V PWM Dimmable (DM)
	3000K (30C)	1332lm	1098lm		Black (BL)	48V DALI Dimmable (DL)
	4000K (40C)	1404lm	1250lm			
	5000K (50C)	1404lm	1250lm			

Ordering Code Example: *CLICK IT LW14-30C-80-1048-BL-DM*





CLICK IT AMBIENT 35W

- Click It A35 spot is the largest sized available linear ambient luminaire of Click It system.
- Available in black or white colour.
- Beam angle of 115 degrees and length of 1200mm
- L90/B10 50.000h
- 3SDCM



Model (LED Power)	CCT	LED Source		Type	CRI	Beam Angle	Colour	Dimming Option
		CR180	CR190					
CLICK IT AMBIENT 34.6W <i>(CLICK IT A35)</i>	2700K (27B)	5525lm	4144lm	Fixed (FX)	80 (80)	115° (115)	White (WH) Black (BL)	42V PWM Dimmable (DM) 48V DALI Dimmable (DL)
	3000K (30B)	5860lm	4395lm		90 (90)			
	4000K (40B)	6165lm	4624lm					
	5000K (50B)	6165lm	4624lm					

Ordering Code Example: CLICK IT A35-30B-FX-80-115-WH-DL


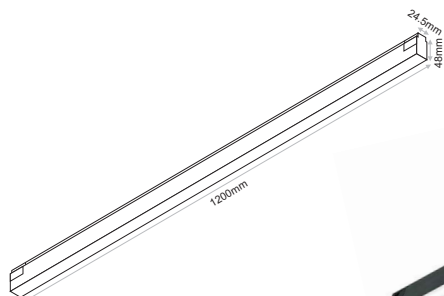


- Click It A25 spot is the larger mid-sized available linear ambient luminaire of Click It system.
- Available in black or white colour.
- Beam angle of 115 degrees and length of 800mm.
- L90/B10 50.000h
- 3SDCM



Model (LED Power)	CCT	LED Source		Type	CRI	Beam Angle	Colour	Dimming Option
CLICK IT AMBIENT 24.8W <i>(CLICK IT A25)</i>	2700K <i>(27B)</i>	3960lm	2970lm	Fixed <i>(FX)</i>	80 <i>(80)</i>	115° <i>(115)</i>	White <i>(WH)</i> Black <i>(BL)</i>	42V PWM Dimmable <i>(DM)</i> 48V DALI Dimmable <i>(DL)</i>
	3000K <i>(30B)</i>	4200lm	3150lm		90 <i>(90)</i>			
	4000K <i>(40B)</i>	4440lm	3330lm					
	5000K <i>(50B)</i>	4440lm	3330lm					

Ordering Code Example: *CLICK IT A25-30B-FX-80-115-WH-DL*

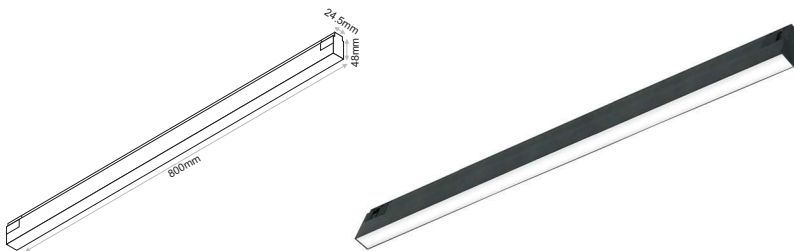



CLICK IT AMBIENT 12W

- Click It A25 spot is the smaller mid-sized available linear ambient luminaire of Click It system.
- Available in black or white colour.
- Beam angle of 115 degrees and length of 407mm.
- L90/B10 50.000h
- 3SDCM

LIGHTSOURCE BY
bridgelux.

Model (LED Power)	CCT	LED Source		Type	CRI	Beam Angle	Colour	Dimming Option
CLICK IT AMBIENT 12.4W <i>(CLICK IT A12)</i>	2700K <i>(27B)</i>	CR180	CR90	Fixed <i>(FX)</i>	80 <i>(80)</i>	115° <i>(115)</i>	White <i>(WH)</i> Black <i>(BL)</i>	42V PWM Dimmable <i>(DM)</i> 48V DALI Dimmable <i>(DL)</i>
	3000K <i>(30B)</i>	1980lm	1485lm		90 <i>(90)</i>			
	4000K <i>(40B)</i>	2100lm	1575lm					
	5000K <i>(50B)</i>	2220lm	1665lm					

Ordering Code Example: *CLICK IT A12-30B-FX-80-115-WH-DL*





- Click It A9 spot is the smallest sized available linear ambient luminaire of Click It system.
- Available in black or white colour.
- Beam angle of 115 degrees and length of 205mm.
- L90/B10 50.000h
- 3SDCM



Model (LED Power)	CCT	LED Source		Type	CRI	Beam Angle	Colour	Dimming Option
CLICK IT AMBIENT 9.2W <i>(CLICK IT A9)</i>	2700K <i>(27B)</i>	990lm	740lm	Fixed <i>(FX)</i>	80 <i>(80)</i>	115° <i>(115)</i>	White <i>(WH)</i> Black <i>(BL)</i>	42V PWM Dimmable <i>(DM)</i> 48V DALI Dimmable <i>(DL)</i>
	3000K <i>(30B)</i>	1050lm	790lm		90 <i>(90)</i>			
	4000K <i>(40B)</i>	1110lm	830lm					
	5000K <i>(50B)</i>	1110lm	830lm					

Ordering Code Example: **CLICK IT A9-30B-FX-80-115-WH-DL**







Today's Dental, Athens, Greece
Photo: Aggelos Mitropoulos

CLICK IT TUBE 30W


- Click It T30 is the large sized linear tube of Click it system.
- It is rotatable 340degree creating an interesting pattern.
- Available in black or white colour.
- With a length of 1200mm.
- L90/B10 50.000h
- 3SDCM



LIGHTSOURCE BY
bridgelux

Model (LED Power)	CCT	LED Source	Type	CRI	Beam Angle	Length	Dimming Option
		CRI90					
CLICK IT TUBE 30.1W <i>(CLICK IT T30)</i>	2700K <i>(27B)</i>	3189lm	Adjustable <i>(AD)</i>	90 <i>(90)</i>	110° <i>(110)</i>	1200mm <i>(1200)</i>	42V PWM Dimmable <i>(DM)</i> 48V DALI Dimmable <i>(DL)</i>
	3000K <i>(30B)</i>	3420lm					
	4000K <i>(40B)</i>	3690lm					
	5000K <i>(50B)</i>	3690lm					

Ordering Code Example: *CLICK IT T30-30B-AD-90-110-1200-DL*






- Click It T23 is the small sized linear tube of Click it system.
- It is rotatable 340degree creating an interesting pattern.
- Available in black or white colour.
- With a length of 8000mm.
- L90/B10 50.000h
- 3SDCM




Model (LED Power)	CCT	LED Source	Type	CRI	Beam Angle	Length	Dimming Option
<i>CR90</i>							
CLICK IT TUBE 22.7W <i>(CLICK IT T23)</i>	2700K <i>(27B)</i>	1843lm	Adjustable <i>(AD)</i>	90 <i>(90)</i>	110° <i>(110)</i>	800mm <i>(800)</i>	42V PWM Dimmable <i>(DM)</i> 48V DALI Dimmable <i>(DL)</i>
	3000K <i>(30B)</i>	1976lm					
	4000K <i>(40B)</i>	2132lm					
	5000K <i>(50B)</i>	2132lm					

Ordering Code Example: *CLICK IT T23-30B-AD-90-110-800-DL*

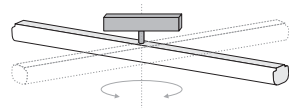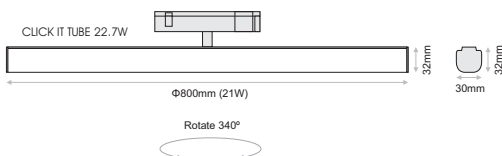


CLICK IT PENDANT 21W

- Click It PD21 is a cylindrical decorative luminaire of Click it system.
- Available in black or white colour.
- It is offered with a variety of accessories : honeycomb, line spread lens, softening lens, snoot, or half snoot.
- L90/B10 50.000h
- 3SDCM


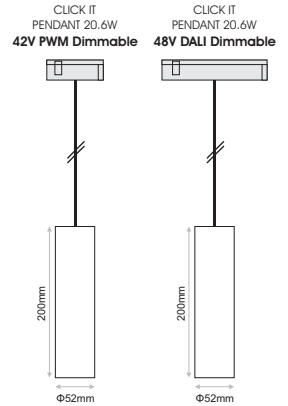


Model (LED Power)	CCT	LED Source		Beam Angle	Colour	Dimming Option	Accessories
		80 (80)	90 (90)				
CLICK IT PENDANT 20.6W <i>(CLICK IT PD21)</i>	2700K (27C)	2147lm	1610lm	18° (18)	White (WH)	42V PWM Dimmable (DM)	Standard (0:)
	3000K (30C)	2309lm	1730lm	37° (37)	Black (BL)	48V DALI Dimmable (DL)	Honeycomb (1:)
	4000K (40C)	2379lm	1785lm	42° (42)			Line spread lens (2:)
	5000K (50C)	2309lm	1730lm				Softening lens (3:)
							(XX)
							EXTRAS
							No Extras (/:0)
							Snoot Black (/:1)
							Half Snoot Black (/:2)
							Frosted Cover (/:3)
							Snoot White (/:4)
							Half Snoot White (/:5)

Ordering Code Example: *CLICK IT PD21-30C-80-37-WH-DL-00*



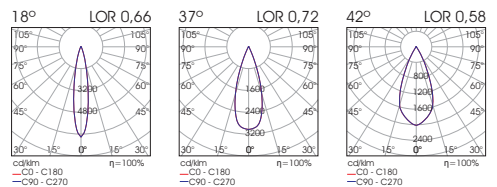


- Click It PD10 is a small sized cylindrical decorative luminaire of Click it system.
- Available in black or white colour.
- UGR<22(46°) / UGR<18(32°) / UGR<18(27°)
- L90/B10 50.000h
- 3SDCM

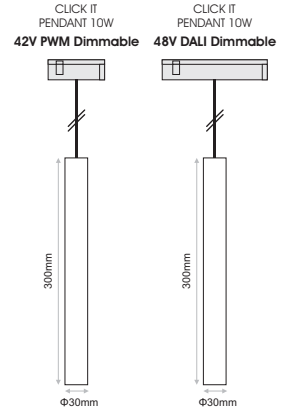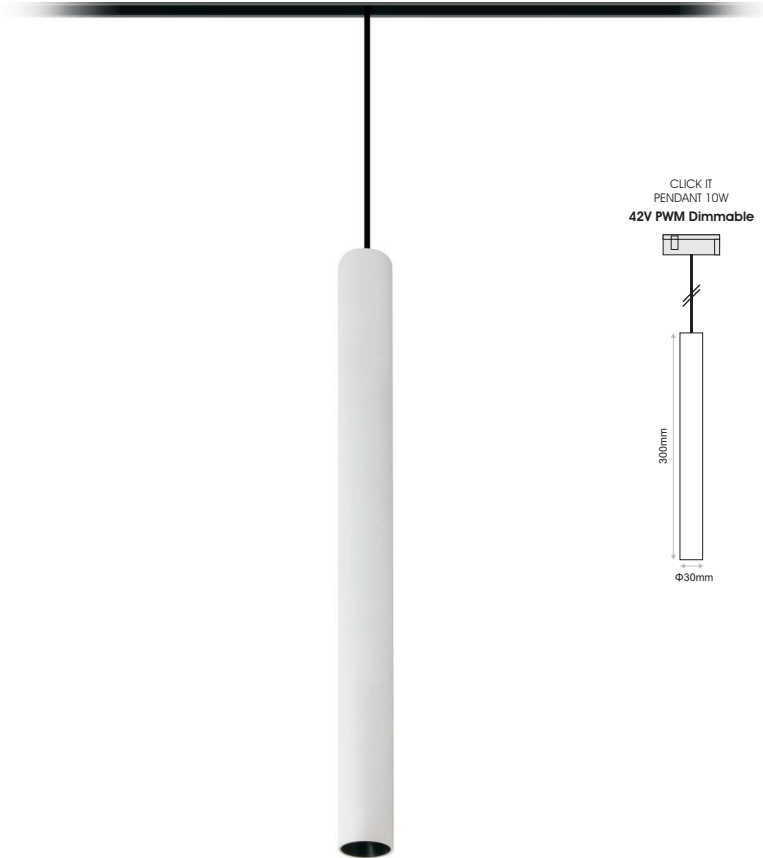

Model (LED Power)	CCT	LED Source		Beam Angle	Colour	Dimming Option
		80 (80)	90 (90)			
CLICK IT PENDANT 10W <i>(CLICK IT PD10)</i>	2700K (27C)	767lm	575lm	27° (27)	White (WH)	42V PWM Dimmable (DM)
	3000K (30C)	823lm	615lm	32° (32)	Black (BL)	48V DALI Dimmable (DL)
	4000K (40C)	888lm	710lm	46° (46)		
	5000K (50C)	888lm	710lm			

Ordering Code Example: *CLICK IT PD10-30C-80-32-WH-DL*



CLICK IT SPHERE SPOT 5W

- Click It SPH SP5 is a glass frosted decorative luminaire that gives a special touch into any space.
- Available in black or white colour.
- L90/B10 50.000h
- 3SDCM





LIGHTSOURCE BY
bridgelux.

Model (LED Power)	CCT*	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option
		<i>CRI80</i>					
CLICK IT SPHERE SPOT 4.5W <i>(CLICK IT SPH SP5)</i>	2700K <i>(27B)</i>	348lm	Fixed <i>(FX)</i>	80 <i>(80)</i>	180° <i>(180)</i>	Black <i>(BL)</i> White <i>(WH)</i>	42V PWM Dimmable <i>(DM)</i>
	3000K <i>(30B)</i>	374lm					48V DALI Dimmable <i>(DL)</i>

* Available also in 4000K & 5000K upon request.

Ordering Code Example: *CLICK IT SPH SP5-30B-FX-80-180-BL-DL*





CLICK IT SPHERE PENDANT 5W



- Click It SPH PD5 is a glass frosted decorative luminaire that gives a special touch into any space.
- Available in black or white colour.
- L90/B10 50.000h
- 3SDCM



Model (LED Power)	CCT*	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option
		CRI80					
CLICK IT SPHERE PENDANT 4.5W <i>(CLICK IT SPH PD5)</i>	2700K (27B)	348lm	Fixed (FX)	80 (80)	180° (180)	Black (BL) White (WH)	42V PWM Dimmable (DM)
	3000K (30B)	374lm					48V DALI Dimmable (DL)

* Available also in 4000K & 5000K upon request.

Ordering Code Example: *CLICK IT SPH PD5-30B-FX-80-180-BL-DL*



CLICK IT PENDANT V 12W

- Click It PD V is a decorative pendant V shaped luminaire of Click It System.
- Available in black, white or gold colour (Inner shade: white).
- Diameter of 318mm.
- L90/B10 50.000h
- 3SDCM



LIGHTSOURCE BY
bridgelux.

Model	Watt	CCT*	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option
CLICK IT PENDANT V <i>(CLICK IT PD V)</i>	12.3W <i>(12)</i>	2700K <i>(27B)</i> 3000K <i>(30B)</i> 4000K <i>(40B)</i>	1365lm 1515lm 1635lm	Fixed <i>(FX)</i>	90 <i>(90)</i>	85° <i>(85)</i>	Black <i>(BL)</i> White <i>(WH)</i> Gold <i>(GD)</i>	42V PWM Dimmable <i>(DM)</i> 48V DALI Dimmable <i>(DL)</i>

* Available also in 5000K upon request.

Ordering Code Example: *CLICK IT PD V-12-30B-FX-90-85-BL-DL*

