


- ELECSIA is a simple low depth linear luminaire suitable for surface, pendant or wall bracket installation.
- L90/B10 50000h (for monochromatic models)
- 3 SDCM (for monochromatic models)
- IP40




Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON

***Available upon request:***

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

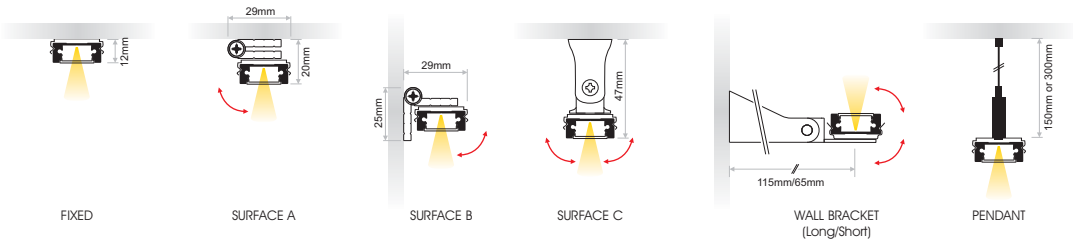

Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage
<b>ELECSIA FIXED</b> (ELECSIA F)	Anodized (AN) White (WH) Black (BL)	2000K (20) 2500K (25) 2700K (27) 3000K (30) 4000K (40) 5700K (57)	≥ 80 (80)	10.5W / 52cm (11W052) 17.5W / 85.3cm (18W085) 21W / 102cm (21W102) 24.5W / 118.7cm (25W119) 31.5W / 152cm (32W152) 42W / 202cm (42W202)	Transparent (TR) Milky Satin (MS) Microprismatic (MP)	24VDC (24)
<b>ELECSIA SURFACE A</b> (ELECSIA SA)						
<b>ELECSIA SURFACE B</b> (ELECSIA SB)						
<b>ELECSIA SURFACE C</b> (ELECSIA SC)						
<b>ELECSIA SHORT BRACKET 6.5cm</b> (ELECSIA B1)						
<b>ELECSIA LONG BRACKET 11.5cm</b> (ELECSIA B2)						
<b>ELECSIA PENDANT</b> (ELECSIA P1) (ELECSIA P2)	H:150cm H:300cm					
<b>RGBWW / RGBCW / RGB</b>						
		<b>Colour</b>		<b>Watt / Length</b>		
		RGBWW (RGBWW)		13.5W / 52cm (14W052)		
		RGBCW (RGBCW)		23.1W / 87.7cm (23W088)		
		84LED/m		27W / 102cm (27W102) 32.8W / 123.4cm (33W123) 40.5W / 152cm (41W152) 54W / 202cm (54W202)		
		RGBWW (RGBWW)		9.7W / 52cm (10W052)		
		RGBCW (RGBCW)		15.6W / 82cm (16W082)		
		60LED/m**		19.5W / 102cm (20W102) 23.4W / 122cm (23W122) 29.2W / 152cm (29W152) 39W / 202cm (39W202)		
		RGB (RGB96)		11.5W / 52cm (12W052) 20.1W / 89.5cm (20W090) 23W / 102cm (23W102) 27.3W / 120.7cm (27W121) 34.5W / 152cm (35W152) 46W / 202cm (46W202)		
		RGB (RGB60)		7.2W / 52cm (07W052) 11.6W / 82cm (12W082) 14.5W / 102cm (15W102) 17.4W / 122cm (17W122) 21.7W / 152cm (22W152) 29W / 202cm (29W202)		
		RGB (RGB30)		3.6W / 52cm (04W052) 5.7W / 82cm (06W082) 7.2W / 102cm (07W102) 8.6W / 122cm (09W122) 10.8W / 152cm (11W152) 14.4W / 202cm (14W202)		12VDC (12)

\* Available in other colours or/and power upon request.  
 \*\* The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: ELECSIA B1-BL-RGB60-22W152-TR-24



**ELA.008**  
Antislipper for vertical installation (as extra)



Input cable with IP connectors (as extra)



Input & Output cables with IP connector (as extra)