


ECLIPSE TR

(Trimless)



- ECLIPSE is a complete series of round luminaires available for surface, pendant, recessed and trimless application.
- The trimless version offers an elegant aesthetically solution for small and large scale projects.
- It consists of two models: High Power and High Efficiency.
- It is offered with a Low Glare (UGR<20,8*) as an option in the High Power model.
- It is offered with a Low UGR (UGR<18*) as an option in the High Efficiency model.
- Luminaire material: Aluminium.
- Cover material: PMMA
- Powder Coated: White (RAL9003)
- Custom luminaire colours also available on request.
- Low tolerances for colour temperature (MacAdam 3).
- Lumen maintenance L80/B10 50.000h
- Emergency Function capability. (3 hours, with build-in rechargeable battery).
- Indoor Use: IP40





LED source efficacy up to 195lm/W (4000K)
Luminaire efficacy up to 119lm/W (4000K)

Available upon request:

- ✓ Custom luminaire colours
- ✓ Emergency version

*Glare Evaluation: X=4H / Y=8H, S=0,25H, Reflection factors: 70/50/20

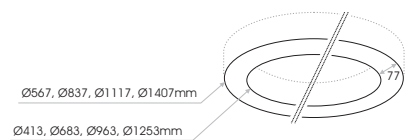

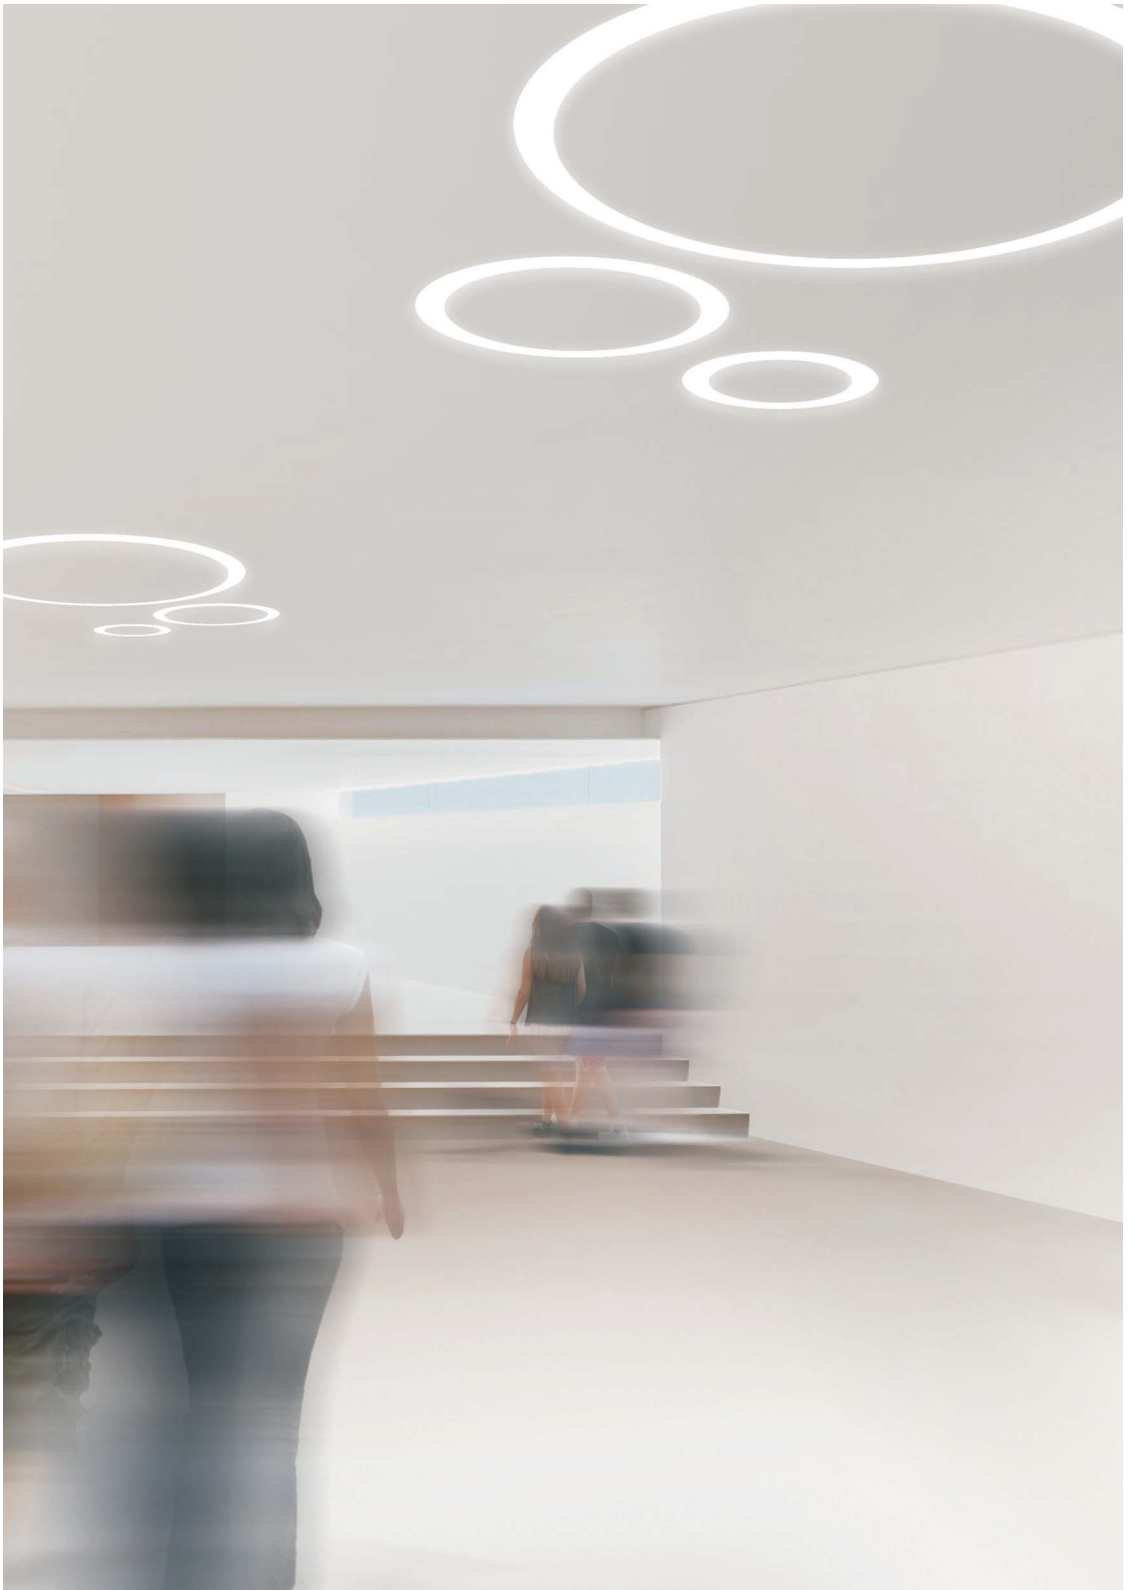




Model	Luminaire Colour	CCT	Watt / Diameter	CRI* LED Source	CRI* LED Source	Type	Voltage	Dimming Option	Extras
ECLIPSE Trimless High Power <i>(ECLIPSE TR HP)</i>	White <i>(WH)</i>	3000K <i>(30)</i>	HIGH POWER	≥ 80 <i>(80)</i> 3000K	≥ 80 <i>(80)</i> 4000K	Opal <i>(OP)</i>	230VAC <i>(230)</i>	Non Dimmable <i>(ND)</i>	Function Standard <i>(0)</i> Emergency <i>(1)</i>
		4000K <i>(40)</i>	46.2W / 58cm <i>(46W058)</i>	6910lm	7310lm	Low Glare <i>(LG)**</i>		Analogue <i>(A1)</i> (1-10V)	
		75W / 85cm <i>(75W085)</i>	11070lm	11740lm		DALI <i>(DL)</i>			
		104.5W / 113cm <i>(105W113)</i>	15490lm	16390lm		Wireless <i>(WL)</i>			
ECLIPSE Trimless High Efficiency <i>(ECLIPSE TR HE)</i>	White <i>(WH)</i>		HIGH EFFICIENCY	≥ 80 <i>(80)</i> 3000K	≥ 80 <i>(80)</i> 4000K	Opal <i>(OP)</i>	230VAC <i>(230)</i>	Non Dimmable <i>(ND)</i>	Function Standard <i>(0)</i> Emergency <i>(1)</i>
			17.6W / 58cm <i>(18W058)</i>	2940lm	3110lm	Low UGR <i>(LU)**</i>			
			26.7W / 85cm <i>(27W085)</i>	4450lm	4720lm				
			37.2W / 113cm <i>(37W113)</i>	6230lm	6590lm				
		47.8W / 142cm <i>(48W142)</i>	8020lm	8480lm					

* Available in CRI90 upon request.

** Low Glare (UGR<20,8), Low UGR (UGR<18)

Ordering Code Example: ECLIPSE TR HE-WH-30-48W142-80-LU-230-ND-0



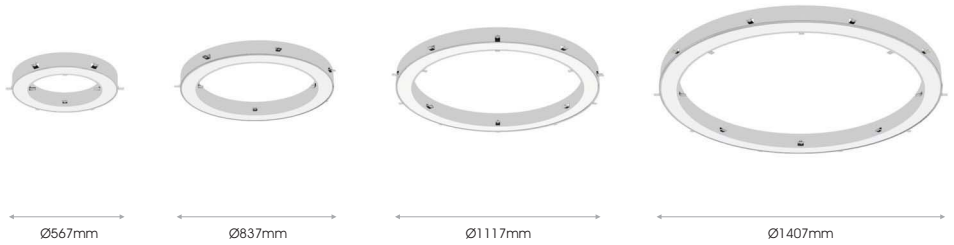


ECLIPSE Trimless

HIGH POWER
HIGH EFFICIENCY

	Ø567mm	Ø837mm	Ø1117mm	Ø1407mm
ECLIPSE Trimless				
HIGH POWER	46W	75W	105W	134W
HIGH EFFICIENCY	18W	27W	37W	48W
Weight	3.63Kgs	5.48Kgs	7.42Kgs	10Kgs

HIGH POWER



HIGH EFFICIENCY

