






- Reform 52 is a complete series of miniaturized downlights available recessed, trimless or surface.
- It is available in round form.
- Power consumption: 12 watt and 8.2 watt.
- Beam angle varies from 4 to 44 degrees.
- Accessories available: honeycomb.
- Luminaire material: aluminium construction/ PC parts.
- It is offered in white and/or black colour as standard but RAL colours also are available on request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<12 /black inner ring).

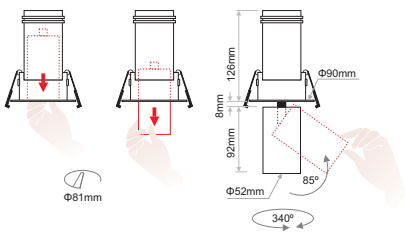


Model	LED Power	CCT*	CRI80, CRI90 LED Source		Beam Angle	Type	Luminaire Colour	Dimming Option	Accessories
			80 (80)	90 (90)					
<b>REFORM 52 IN-OUT Recessed</b> <i>(REFORM 52 IO RC)</i>	<b>8.2W</b> (8)	2700K (27C)	779lm	628lm	6° (06)	Adjustable (AD)	{XXX} ↑ ↑ ↑ <b>Base</b> White (W) Black (B) <b>Spot</b> White (W) Black (B) <b>Inner Ring</b> White (W) Black (B)	Without Driver (00)	{XX} ↑
		3000K (30C)	779lm	673lm				Non Dimmable (ND)	
		4000K (40C)	841lm	726lm				Analogue (1-10V) (A1)	
	<b>12W</b> (12)	2700K (27C)	1590lm	1380lm	21° (21)	DMX (DX)		Standard (0)	
		3000K (30C)	1710lm	1485lm	33° (33)	DALI (DL)		Honeycomb (1)	
		4000K (40C)	1830lm	1590lm	44° (44)	Push Button (PB)		Line spread lens (2)	
5000K (50C)	1710lm	1590lm		Phase Cut (PC)	Softening lens (3)				
						Wireless ** (WL)	<b>EXTRAS</b>		
							No Extras (0)		
							Emergency (1)		

\* Models with CCTs of 3500K, 5000K & 6500K are available upon request.  
 \*\* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:  
 REFORM 52 IO RC-12-40C-80-33-AD-WWB-00-01



Inner ring colour:  
**BLACK**

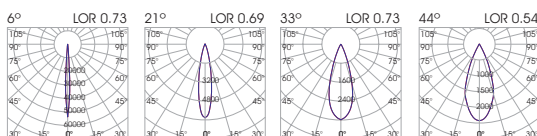

Inner ring colour:  
**WHITE**

