

- Reform 75 is series of downlights available recessed or surface.
- It is available in round form.
- Power consumption : 23.5watt and 18watt.
- Beam angle varies from 17 to 50 degrees.
- Accessories available: honeycomb, line spread lens or softening lens.
- Luminaire material: aluminium construction/ PC parts.
- It is offered in white and/or black colour as standard but RAL colours also are available on request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<15 /black inner ring).






Model	LED Power	CCT*	CRI80, CRI90 LED Source	Beam Angle	Type	Luminaire Colour	Dimming Option	Accessories
			80 (80) 90 (90)					
REFORM 75 Recessed Spot <i>(REFORM 75 RCSP)</i>	18W (18)	2700K (27C)	2067lm 1794lm	17° (17)	Adjustable (AD)	Base White (W) Black (B) Spot White (W) Black (B) Inner Ring White (W) Black (B)	Without Driver (00)	Standard (0) Honeycomb (1) Line spread lens (2) Softening lens (3) EXTRAS No Extras (0) Emergency (1)
		3000K (30C)	2223lm 1931lm	27° (27)			Non Dimmable (ND)	
		4000K (40C)	2379lm 2067lm	50° (50)			Analogue (1-10V) (A1)	
	23.5W (24)	2700K (27C)	2919lm 2409lm				DMX (DX)	
		3000K (30C)	3102lm 2512lm				DALI (DL)	
		4000K (40C)	3192lm 2663lm				Push Button (PB)	
	5000K (50C)	3230lm 2791lm		Phase Cut (PC)	Wireless ** (WL)			


* Models with CCTs of 3500K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: REFORM 75 RCSP-18-40C-80-50-AD-WWB-00-10

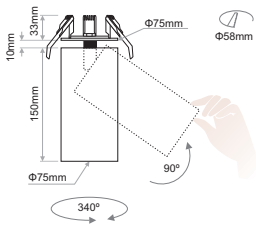

Inner ring colour:
BLACK

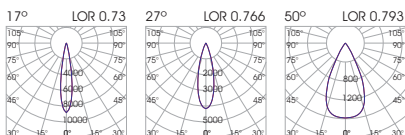

Inner ring colour:
WHITE

