



- Whisper is a high aesthetically downlight available recessed or trimless.
- It is available either round or square.
- WHISPER DEEP version is also available for LED lamps.
- Luminaire outer trim material: aluminium.
- Outer trim available in black or white as standard but custom colours also available upon request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<15 for DEEP version models).
- Selection of IP protection: either IP20 or IP54 (face only).


RC



ADJ



Name	Shape*	Model	CCT	CRI80, CRI90 LED Source	Beam Angle	Luminaire Colour: Trim/Inner Case	Dimming Option	Accessories
				80 (80) 90 (90)				
WHISPER RC (WHISPER RC)	Round (RD)	Low Depth 7W (LD7)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	930lm 960lm 1020lm 1020lm	762lm 792lm 840lm 840lm	30° (30)	White/White (WW) White/Black (WB) Black/Black (BB) Black/White (BW)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)
WHISPER ADJ (WHISPER A)	Square (SQ)	Standard 6.2W (ST6)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	704lm 713lm 760lm 736lm	568lm 608lm 656lm 704lm	18° (18) 37° (37) 52° (52)		
		Standard 12.2W (ST12)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	1590lm 1710lm 1830lm 1710lm	1380lm 1485lm 1590lm 1590lm			
		Standard 18W (ST18)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	2067lm 2223lm 2379lm 2223lm	1794lm 1931lm 2067lm 2067lm			
		Narrow Beam 6W (NB6)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	616lm 616lm 665lm 714lm	497lm 532lm 574lm 616lm	9° (09)		
		Narrow Beam 8W (NB8)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	792lm 792lm 855lm 918lm	639lm 684lm 738lm 792lm			
		Zoom 6.4W (ZM6)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	704lm 713lm 760lm 736lm	568lm 608lm 656lm 704lm	22°~50° (2250)		
		Zoom 13W (ZM13)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	1306lm 1360lm 1435lm 1453lm	1098lm 1150lm 1236lm 1236lm			
		Warm Dimming 0.2~6W (WD6)	1800K~3000K (1830B)	636lm	518lm	18° (18) 37° (37) 52° (52)	Analogue (1-10V) (A1) DALI (DL) Phase Cut (PC) Wireless** (WL)	
		Warm Dimming 12W (WD12)	1800K~3000K (1830B)	1246lm	1045lm			
		Tunable White 5.9W (TW6)	2700K~5000K (2750B)	585lm (both CCT's driven)			DALI (DL) Wireless** (WL)	
		Tunable White 11.5W (TW12)	2700K~5000K (2750B)	987lm (both CCT's driven)				

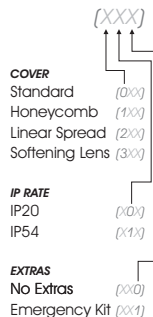

* WHISPER ADJ only available in round shape
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: WHISPER RC-RD-ST18-30C-80-37-WW-DL-100

WHISPER DEEP LL



Model	Shape*	Luminaire Colour:	Lamp Holder	Accessories
WHISPER RC DEEP LL (WHISPER RC DEEP LL)	Round (RD) Square (SQ)	White/White (WW) White/Black (WB) Black/Black (BB) Black/White (BW)	GU10 (max 7.5W) (G1)	<div> <div>COVER</div> <div>Standard (0X)</div> <div>Honeycomb (1X)</div> <div>Linear Spread (2X)</div> <div>Softening Lens (3X)</div> </div> <div> <div>IP RATE</div> <div>IP20 (X0)</div> <div>IP54 (X1)</div> </div>
WHISPER ADJ DEEP LL (WHISPER A DEEP LL)				




* WHISPER ADJ DEEP Retrofit only available in round shape

Ordering Code Example:
WHISPER RC DEEP LL-RD-WW-G1-10






LD7

WHISPER RD BL






ST6/ ST12/ ST18/ WD6/ WD12/ TW6/ TW12

WHISPER RD BL




WHISPER SQ BL





NB6/ NB8

WHISPER RD BL





ZM6/ ZM13


WHISPER RD BL





WHISPER RC

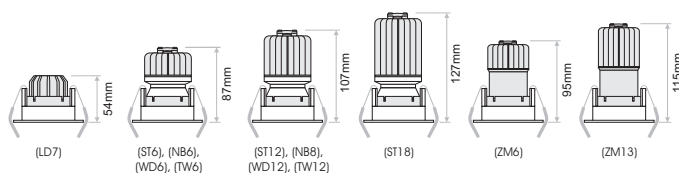

WHISPER RC DEEP LL



WHISPER ADJ

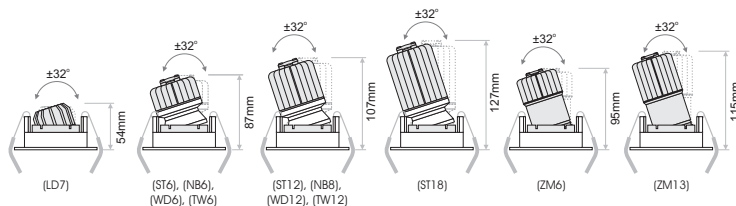

WHISPER ADJ DEEP LL

