



FORMA FLEX System

FORMA FLEX SYSTEM

- Forma Flex is a new miniaturized system suitable for highly demanding spaces.
- The system is suitable only for surface application.
- Track material: aluminium / stainless steel.
- Flexibility of the track itself with the ability of extra high bending.
- Flexibility and easiness in the repositioning of the luminaires.
- Forma Flex system includes: Fixed and adjustable spots, decorative sphere and acrylic spots.
- Maximum load per system: 280W
- The system is offered in 48Vdc PWM Dimmable or Wireless Dimmable.



Forma Flex **Surface** Track

Code	Model	Length	Colour
FFL.001	Forma Flex Surface Track	5m	Black
FFL.002	Forma Flex Surface Track	10m	Black
FFL.003	Forma Flex Surface Track	20m	Black



Accessories for Forma Flex System

Code	Description	Colour
FFL.004	Live End	Black
FFL.005	Track Holder	Black
FFL.019	End Cap	Black





FORMA FLEX



SPOT BRACKET ADJ 4W & 9W

- FORMA FLEX SB consists of two sized spots with bracket and a diameter of $\Phi 28\text{mm}$ and $\Phi 44\text{mm}$.
- Luminaire body material: aluminium.
- Available in black colour.
- L90/B10 50.000h
- 3SDCM



Model	LED Power	CCT	CRI80 LED Source	CRI90 LED Source	Beam Angle	Type	Colour	Dimming Option
FLEX SPOT BRACKET <i>(FLEX SB)</i>	3.8W <i>(04)</i>	2700K <i>(27C)</i> 3000K <i>(30C)</i> 4000K <i>(40C)</i> 5000K <i>(50C)</i>	80 <i>(80)</i>	90 <i>(90)</i>		Adjustable <i>(AD)</i>	Black <i>(BL)</i>	48V PWM Dimmable <i>(DM)</i>
			485lm	390lm	28° <i>(28)</i>			
			485lm	420lm	36° <i>(36)</i>			
			520lm	450lm	50° <i>(50)</i>			
			525lm	485lm				
	8.5W <i>(09)</i>	2700K <i>(27C)</i> 3000K <i>(30C)</i> 4000K <i>(40C)</i> 5000K <i>(50C)</i>	1065lm	865lm	18° <i>(18)</i>			
			1070lm	925lm	34° <i>(34)</i>			
			1145lm	995lm	40° <i>(40)</i>			
			1150lm	1005lm				

Ordering Code Example: FLEX SB-04-30C-90-38-AD-WH-DM



FORMA FLEX

SPOT 4W & 9W



- FORMA FLEX SP consists of two sized spots with a diameter of $\Phi 30\text{mm}$ and $\Phi 52\text{mm}$.
- Luminaire body material: aluminium.
- Available in black colour.
- It is offered with a variety of accessories : honeycomb, line spread lens, softening lens.
- Rail spot 4W UGR<19(50°) / UGR<10(35°) / UGR<10(25°)
- Rail spot 9W UGR<21(40°) / UGR<14(34°) / UGR<17(18°)
- L90/B10 50.000h
- 3SDCM



CREE
LEDs

Model	LED Power	CCT	CR180 LED Source	CR190 LED Source	Beam Angle	Type	Colour	Dimming Option	Accessories
			80 (80)	90 (90)					
FLEX SPOT (FLEX SP)	3.8W (04)	2700K (27C)	485lm	390lm	25° (25)	Fixed (FX)	Black (BL)	48V PWM Dimmable (DM)	Standard (0)
		3000K (30C)	485lm	420lm	35° (35)				Honeycomb (1)
		4000K (40C)	520lm	450lm	50° (50)				Line spread lens (2)
		5000K (50C)	525lm	485lm					Softening lens (3)
	8.5W (09)	2700K (27C)	1065lm	865lm	20° (20)				
		3000K (30C)	1070lm	925lm	30° (30)				
		4000K (40C)	1145lm	995lm	50° (50)				
		5000K (50C)	1150lm	1005lm					

Ordering Code Example: FLEX SP-04-30C-90-38-AD-WH-DM-1

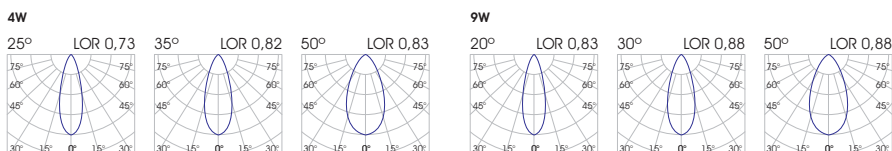

FORMA FLEX





ACRYLIC 4W & 9W

- FORMA FLEX AC consists of two sized spots with a diameter of $\Phi 30\text{mm}$ and $\Phi 52\text{mm}$.
- Luminaire body material: aluminium with acrylic ending.
- Available in black colour.
- L90/B10 50.000h
- 3SDCM



Model	LED Power	CCT	CRI80 LED Source	CRI90 LED Source	Beam Angle	Type	Colour	Dimming Option
FLEX SPOT ACRYLIC (FLEX SA)	3.8W (04)	2700K (27C)	80 (80)	90 (90)	Diffused (DF)	Fixed (FX)	Black (BL)	48V PWM Dimmable (DM)
		3000K (30C)	485lm	390lm				
		4000K (40C)	485lm	420lm				
		4000K (40C)	520lm	450lm				
		5000K (50C)	525lm	485lm				
	8.5W (09)	2700K (27C)	1065lm	865lm				
		3000K (30C)	1070lm	925lm				
		4000K (40C)	1145lm	995lm				
		4000K (40C)	1150lm	1005lm				
		5000K (50C)						

Ordering Code Example: FLEX SA-04-30C-90-DF-FX-BL-DM



FORMA FLEX

SPHERE SPOT 4W



- FORMA FLEX SPH is a glass frosted decorative luminaire that gives a special touch into any space.
- Available in black colour.
- L90/B10 50.000h
- 3SDCM



LIGHTSOURCE BY
bridgelux

Model	LED Power	CCT	CRI80 LED Source	CRI90 LED Source	Beam Angle	Type	Colour	Dimming Option
			80 (80)	90 (90)				
FLEX SPHERE (FLEX SPH)	4W (04)	2700K (27B) 3000K (30B) 4000K (40B) 5000K (50B)	255lm 260lm 280lm 285lm	230lm 235lm 255lm 260lm	Diffused (DF)	Fixed (FX)	Black (BL)	48V PWM Dimmable (DM)

Ordering Code Example: FLEX SPH-04-30B-90-38-FX-BL-DM



FORMA FLEX

SPHERE PENDANT 4W



- FORMA FLEX SPH PD is a glass frosted decorative luminaire that gives a special touch into any space.
- Available in black colour.
- L90/B10 50.000h
- 3SDCM



LIGHTSOURCE BY
bridgelux.

Model	LED Power	CCT	CRI80 LED Source	CRI90 LED Source	Beam Angle	Type	Colour	Dimming Option
			80 (80)	90 (90)				
FLEX SPHERE PENDANT (FLEX SPH PD)	4W (04)	2700K (27B) 3000K (30B) 4000K (40B) 5000K (50B)	255lm 260lm 280lm 285lm	230lm 235lm 255lm 260lm	Diffused (DF)	Fixed (FX)	Black (BL)	48V PWM Dimmable (DM)

Ordering Code Example: FLEX SPH PD-04-30B-90-DF-FX-BL-DM



FORMA FLEX

PENDANT 6W

- FORMA FLEX PD is a cylindrical decorative luminaire of Forma Flex system.
- Luminaire body material: aluminium.
- Available in black colour.
- L90/B10 50.000h
- 3SDCM



Model	LED Power	CCT	CRI80 LED Source	CRI90 LED Source	Beam Angle	Type	Colour	Dimming Option
			80 (80)	90 (90)				
FLEX PENDANT (FLEX PD)	6W (06)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	660lm 665lm 710lm 715lm	530lm 570lm 615lm 660lm	25° (25) 35° (35) 50° (50)	Fixed (FX)	Black (BL)	48V PWM Dimmable (DM)

Ordering Code Example: FLEX PD-06-30C-90-35-FX-BL-DM

