


LIGUA 1 IP67

- LIGUA 1 IP67 is a linear single side light emitting luminaire suitable for indoor and outdoor decorative applications, offering a soft delicate light output.
- Available anodized, White (RAL 9003 Mat), Black (RAL 9005 Mat) & Brown. Other RAL options are also available on request.
- Suitable with Baseline V.
- Silicone monochromatic White LEDs: 2 step MacAdam.
- L70/B10 > 54000h
- CRI > 90 for 2700/3000/3500/4000K
- Ingress Protection: IP67

Lighting management options:
On-Off/DALI/0...10V/1...10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

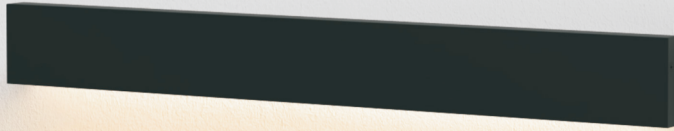


IP67

Model	Luminaire Colour*	Type	CCT	Luminus FLUX	CRI	Watt / Length	Voltage	
LIGUA 1 IP67 <i>(LIGUA 1 67)</i>	Anodized <i>(AN)</i>	PRO <i>(PR)</i>	2700K <i>(27)</i>	500 lm/m	>90 <i>(90)</i>	5W / 52cm <i>(05W052)</i>	24VDC <i>(24)</i>	
	White <i>(WH)</i>		3000K <i>(30)</i>	510 lm/m		10W / 102cm <i>(10W102)</i>		
	Black <i>(BL)</i>		3500K <i>(35)</i>	515 lm/m		15W / 152cm <i>(15W152)</i>		
	Brown <i>(BR)</i>		4000K <i>(40)</i>	530 lm/m		20W / 202cm <i>(20W202)</i>		
			5300K <i>(53)</i>	540 lm/m		>80 <i>(80)</i>		
			Standard <i>(ST)</i>	2700K <i>(27)</i>		420 lm/m		>90 <i>(90)</i>
				3000K <i>(30)</i>		430 lm/m		
				3500K <i>(35)</i>		435 lm/m		
				4000K <i>(40)</i>		450 lm/m		
				5300K <i>(53)</i>		460 lm/m		

* Available in other colours upon request.

Ordering Code Example: LIGUA 1 67-WH-PR-40-90-10W102-24

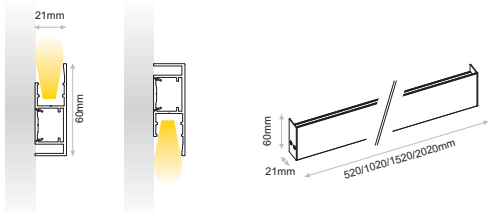

Available upon request:
 ✓ Custom dimensions
 ✓ Custom luminaire colours