


- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications.
- It includes models for recessed and trimless installations.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- 3 SDCM
- L90/B10 50000h
- Constant current
- Indoor use: IP40




LIMA WASH 10




128x35mm

LIMA WASH 21



248x35mm






IP40

Model (LED Power)	CCT	CRI80, CRI90 LED Source		Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
		80 (80)	90 (90)					
LIMA WASH 10W Recessed <i>(LIMA W10 RC)</i>	2700K (27C)	1320lm	1160lm	Fixed (FX)	45°x75° (45)	White/Black (WB) Black/Black (BB)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless* (WL)	COVER Standard EXTRAS No Extras (X0) Emergency Kit (X1)
	3000K (30C)	1320lm	1235lm					
	4000K (40C)	1405lm	1320lm					
	6500K (65C)	1480lm	-					
LIMA WASH 21W Recessed <i>(LIMA W21 RC)</i>	2700K (27C)	2640lm	2320lm					
	3000K (30C)	2640lm	2470lm					
	4000K (40C)	2810lm	2640lm					
	6500K (65C)	2960lm	-					

* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: LIMA W21 RC-30C-80-FX-45-WB-ND-00

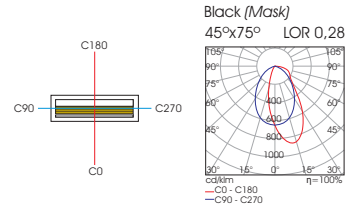

Luminaire Colour: Trim/Mask

