

TETRA PLUS Series



- TETRA PLUS linear luminaire is available for surface, recessed, trimless or pendant application.
- L80/B10 50.000h (for monochromatic models)
- 3 SDCM
- IP40

230V EMERGENCY

- 3 hours EMERGENCY operation.
- DALI dimmable upon request for monochromatic models (except 32W113 model).

TUNABLE WHITE

- Linear Tunable White system with adjustable colour temperature from 3000K to 6000K at constant luminous flux.

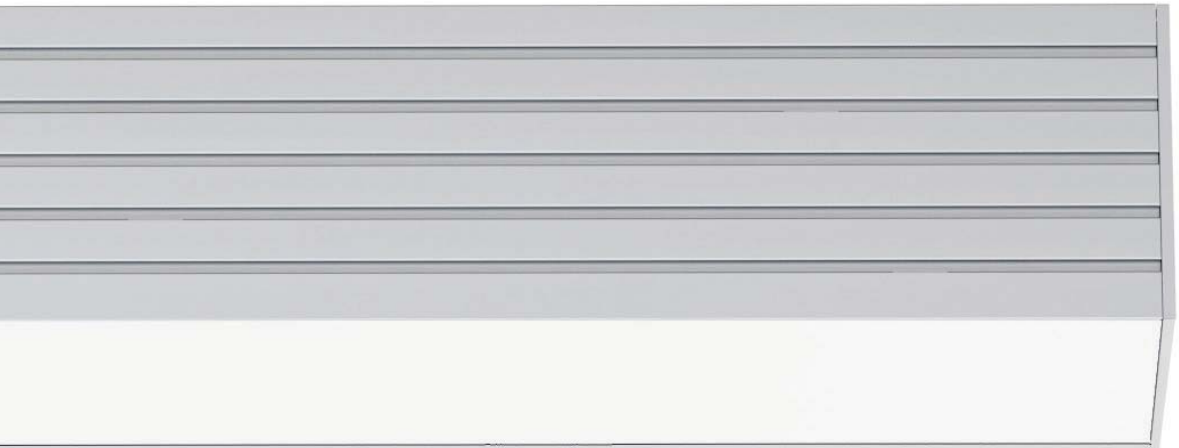


Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



Anodized

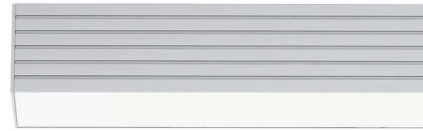

White



Black



Model	Luminaire Colour	CRI	Type	Voltage*	CCT**	Watt / Length	Initial LED Lumen (no cover)		
TETRA PLUS SURFACE <i>(TETRA PLUS SF)</i>	Anodized <i>(AN)</i>	≥ 80 <i>(80)</i>	Milky Satin <i>(MS)</i>	230VAC <i>(230)</i>	3000K <i>(30)</i> 4000K <i>(40)</i>	16W / 57cm <i>(16W057)</i>	2060lm	2240lm	
	White <i>(WH)</i>					24W / 85cm <i>(24W085)</i>	3090lm	3360lm	
	Black <i>(BL)</i>					32W / 113cm <i>(32W113)</i>	4120lm	4480lm	
TETRA PLUS SURFACE with HINGE <i>(TETRA PLUS SH)</i>						40W / 141cm <i>(40W141)</i>	5150lm	5600lm	
						48W / 169cm <i>(48W169)</i>	6180lm	6720lm	
						56W / 197cm <i>(56W197)</i>	7210lm	7840lm	
TETRA PLUS RECESSED <i>(TETRA PLUS RC)</i>									
TETRA PLUS TRIMLESS <i>(TETRA PLUS TR)</i>									
TETRA PLUS PENDANT <i>(TETRA PLUS PD)</i>									
							230V EMERGENCY ☀️		
						32W / 113cm <i>(32W113)</i>	4120lm	4480lm	
						40W / 141cm <i>(40W141)</i>	5150lm	5600lm	
						48W / 169cm <i>(48W169)</i>	6180lm	6720lm	
						56W / 197cm <i>(56W197)</i>	7210lm	7840lm	
				Voltage	CCT	Watt / Length	Initial LED Lumen (no cover)		
				230VAC DALI Dimmable <i>(230DL)</i>	TUNABLE WHITE Tunable White 3000K–6000K <i>(TW)</i>	20W / 86cm <i>(20W086)</i> 26W / 114cm <i>(26W114)</i> 32W / 142cm <i>(32W142)</i> 40W / 86cm <i>(40W086)</i> 52W / 114cm <i>(52W114)</i> 62W / 142cm <i>(62W142)</i>	2100lm 2650lm 3350lm 4300lm 5700lm 7150lm		
					TUNABLE WHITE 230V EMERGENCY ☀️	32W / 142cm <i>(32W142)</i> 62W / 142cm <i>(62W142)</i>	3350lm 7150lm		

* Available in 230VAC DALI dimmable upon request.
** Available in 2700K, 3500K and 6500K upon request.

Ordering Code Example: TETRA PLUS SF-BL-80-MS-230-30-56W197

